



NEW RAGE CYCLES

INSTALLATION INSTRUCTIONS

MV AGUSTA F3

FENDER ELIMINATOR

- 1 Lift passenger seat and remove dzus fitting (picture 1)
- 2 Remove stock seat
- 3 Pop off side panel (picture 2)
- 4 Remove six 4mm allen bolts from lower black body pan
- 5 Remove 2mm allen bolts on top of stock tail light (picture 3/4)
- 6 Remove all 4mm bolts holding both side panels and let lower black panel hang (picture 5)
- 7 Remove 5mm allen bolt (picture 6)
- 8 Slide out rubber straps holding wiring harness
- 9 With a 10mm wrench, remove bolts to passenger seat and slide out black panel behind the passenger seat bracket (picture 7)
- 10 Disconnect all 3 white connectors

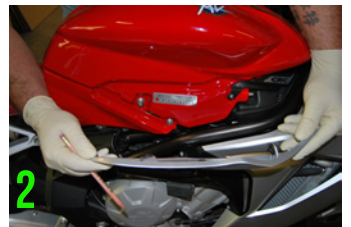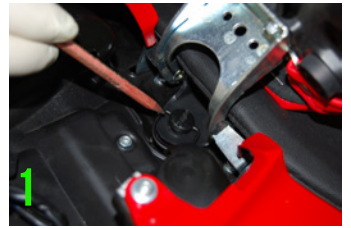

NEW RAGE CYCLES

INSTALLATION INSTRUCTIONS

FENDER ELIMINATOR

- 11 Remove 4 bolts holding on stock license plate bracket (picture 8)
- 12 Now that the box is removed, re-assemble everything short of seats
- 13 Now take your NRC fender eliminator out of the box and assemble license plate to turn signal plate (picture 9)
- 14 Slide NRC connectors through slot in back, and lightly tighten nut to washer – do not over tighten yet (picture 10)
- 15 Remove double sided tape backer, align the bracket on the body, and lightly stick to bottom body panel
- 16 Once your fender eliminator is lined up, tighten the nut underneath passenger seat
- 17 Plug in new connectors to stock wiring harness
- 18 Reinstall stock harness cover
- 19 Make sure all body panels are put back together, re-install both seats, and enjoy!

