


NEW RAGE CYCLES

INSTALLATION INSTRUCTIONS

TRIUMPH THRUXTON 1200

FENDER ELIMINATOR (2016-PRESENT)

- 1 Remove seat
- 2 Unplug stock harness (picture 1)
- 3 Remove cover for ECU and slide ECU out of the way
- 4 To remove fender, unbolt 4 hex bolts on top of seat frame, and 2 hex bolts below fender (picture 2/3)
- 5 With provided M6x10mm bolts and tooth washers, mount NRC license plate bracket to fender eliminator plate (picture 4)
- 6 With provided four M6x40/45mm bolts, slide through fender eliminator plate, slide white spacers over the top, mount onto the bike, and tighten with nylon nuts (picture 5/6)
- 7 With provided M6x10mm bolts, screw into lower holes on fender eliminator plate (picture 7)
- 8 Slide plate light wires through center hole on fender eliminator plate (picture 8)
- 9 Make sure all bolts are tightened, and plug in provided connector into the stock harness
- 10 Mount ECU onto fender eliminator plate and reinstall ECU cover (picture 9)
- 11 Put seat back onto the bike and ride safe

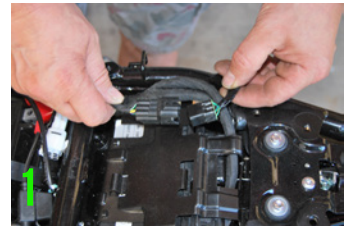

NEW RAGE CYCLES

INSTALLATION INSTRUCTIONS

FENDER ELIMINATOR

If mounting EU plate bracket:

- 1 With provided four M6x40/45mm bolts, slide through fender eliminator plate, slide white spacers over the top, mount onto the bike, and tighten with nylon nuts (picture 10)
- 2 Continue on with the instructions above

If mounting 'Tucked' license plate bracket

- 1 With provided four M6x40/45mm bolts, slide through fender eliminator plate, slide white spacers over the top, mount onto the bike, and tighten with nylon nuts (picture 5/6)
- 2 With provided M6x12mm bolts, mount tucked plate and bolt license plate to it
- 2 Continue on with instructions above

