


CUSTOM MOTORCYCLE ACCESSORIES

NEW PAGE CYCLES

TRIUMPH THRUXTON FENDER ELIMINATOR KIT




1. Unbolt allen bolts to remove seat cowl
2. To remove seat, remove 2 allen bolts (picture 1)
3. Unplug stock wiring harness (picture 2)
4. Remove 4 bolts to take out stock fender (picture 3 / 4)
5. Using stock bolts and supplied lock nuts, bolt in new splash shield (picture 5)
6. With provided bolts and nuts, install license plate bracket onto signal bracket
7. Slide seat back into place leaving bolts out

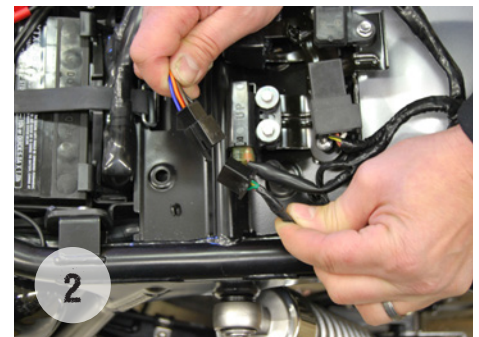

CUSTOM MOTORCYCLE ACCESSORIES

NEW PAGE CYCLES

8. Position new tail light tabs behind seat tabs, and gently thread in both bolts (picture 6)
9. Once tail light is aligned, tighten both bolts
10. Plug new wiring harness into stock connector

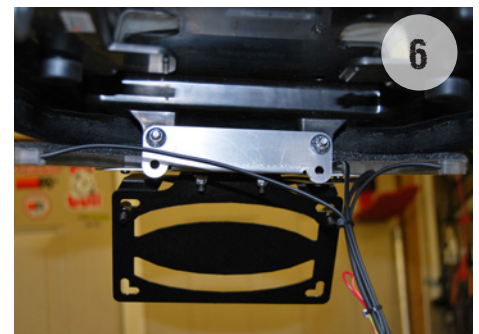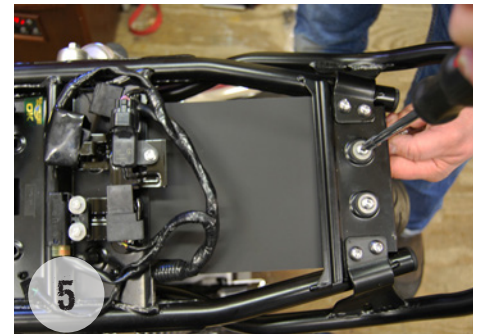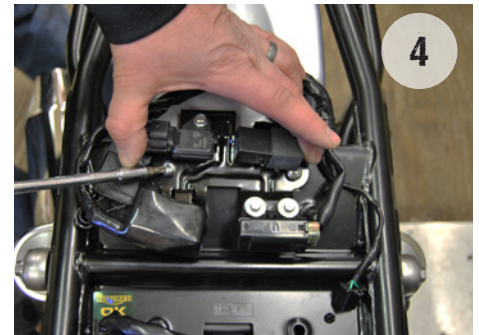

If you're looking for quality motorcycle frame & body, visit our website.