




# NEW RAGE CYCLES

## INSTALLATION INSTRUCTIONS

### HARLEY DAVIDSON GEN 2 VROD

#### FENDER ELIMINATOR

- 1 Remove (2) bolts underneath seat to take off plastic shield (picture 1)
- 2 Disconnect (2) plugs (picture 2)
- 3 To remove fender, move ECU panel out of the way and remove (4) bolts (picture 3)
- 4 Unbolt (2) 4mm and (2) 3mm bolts to remove stock license plate bracket (picture 4)
- 5 Use (2) 3mm bolts and reuse to mount stock tail light (picture 5)
- 6 Mount NRC license plate bracket to new fender eliminator using M6x10 bolts and nylon nuts (picture 6)
- 7 With provided 10-32 x 1.25 bolts and 3/4" spacers, mount NRC fender eliminator (picture 7)

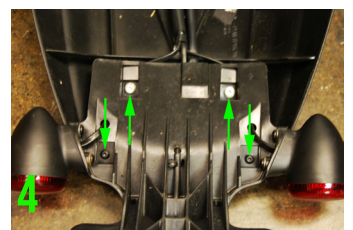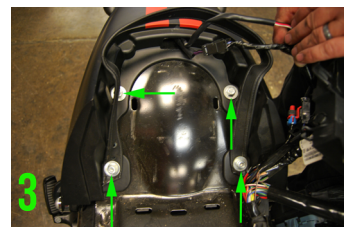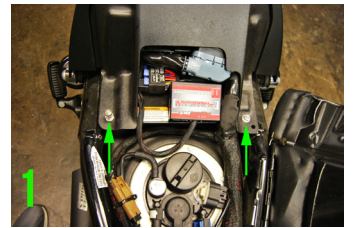

# NEW RAGE CYCLES

## INSTALLATION INSTRUCTIONS

### FENDER ELIMINATOR

- 8 Zip tie harness up through fender and up underneath seat
- 9 Plug in harness
- 10 Mount seats

