




NEW RAGE CYCLES

INSTALLATION INSTRUCTIONS

2017 YAMAHA R6

FENDER ELIMINATOR

- 1 Remove stock seat
- 2 Unbolt (4) bolts to remove seat lock bracket and turn signal bracket (picture 1)
- 3 Unplug (2) turn signal connectors and (2) barrel connectors for plate light
- 4 Remove (4) bolts to slide off stock tail section (picture 2)
- 5 Take (2) of the provided torx bolts and mount license plate bracket (picture 3)
- 6 Slide all connectors through factory hole and up underneath seat.
- 7 Take other (2) torx bolts and mount lens bracket using the other 2 mounting holes (picture 4)
- 8 Tighten (4) nuts to secure new fender eliminator (picture 5)

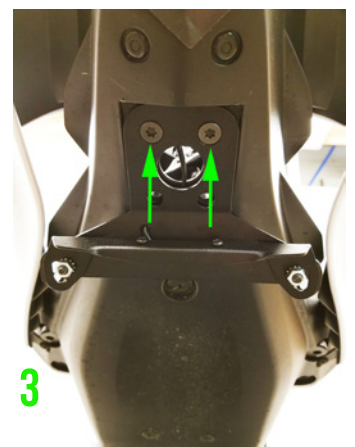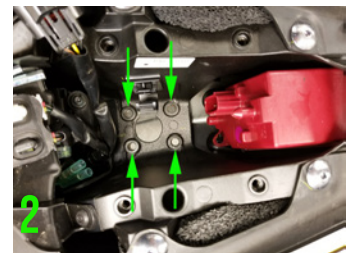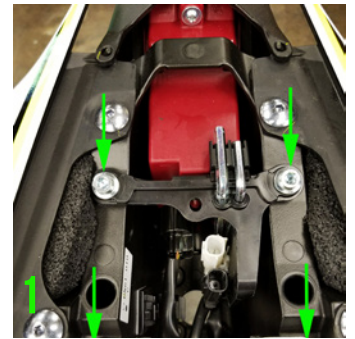

NEW RAGE CYCLES

INSTALLATION INSTRUCTIONS

FENDER ELIMINATOR

- 9 Plug in all connectors and test
- 10 Re-install seat lock and turn signal brackets underneath seat
- 11 Put seat back on

