











Ref.: 6861
Mod. TOURING

Ref.: 6859
Mod. SPORT

MOUNTING INSTRUCTIONS

WINDSHIELD FOR YAMAHA MT-09 '13-'16

ID.	PART	DESCRIPTION	QTY.
1		TOURING Windshield (ref.6861)	1
		SPORT Windshield (ref.6859)	
2		Plate visera (Visor to avoid magnifying glass effect)	1
3		Right metal support	1
4		Left metal support	1
5		Silentblock M5	4
6		M5x16 ISO 7380 Allen screw	4
7		M5x0,5 Nylon washer	4
8		Adhesive strip 2 units 18mm X 7mm	2

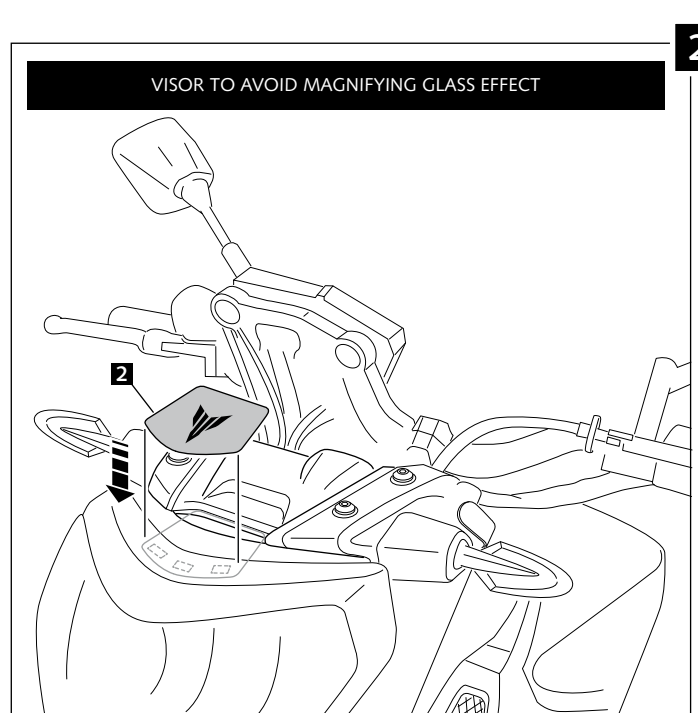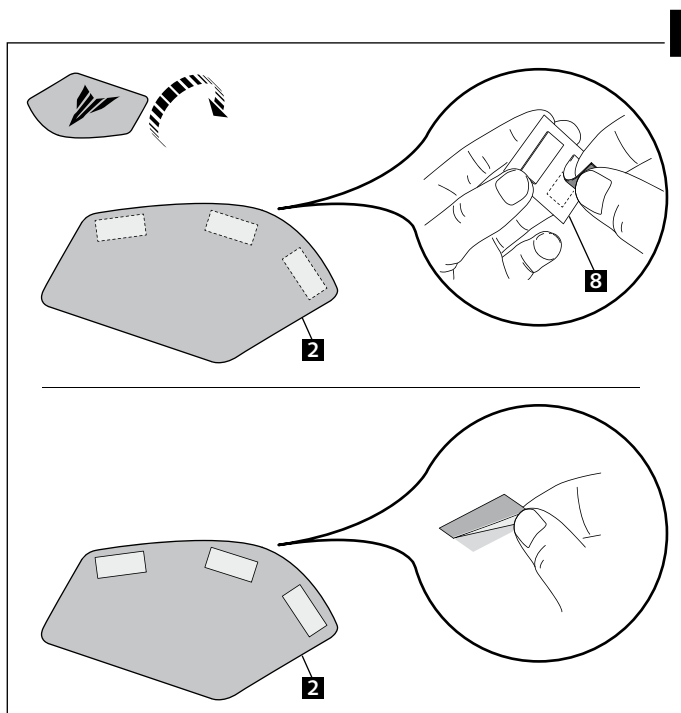


Ref.: 6861
Mod. TOURING


Ref.: 6859
Mod. SPORT

MOUNTING INSTRUCTIONS

WINDSHIELD FOR YAMAHA MT-09 '13-'16

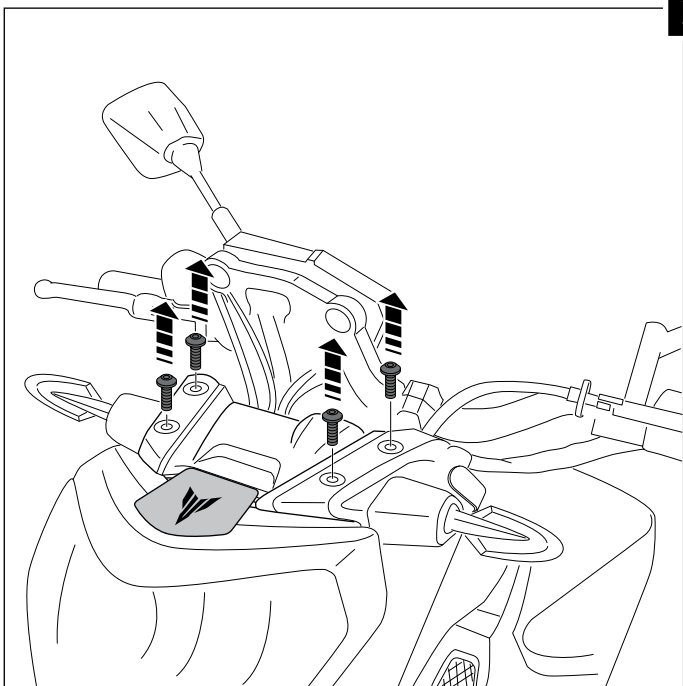


3

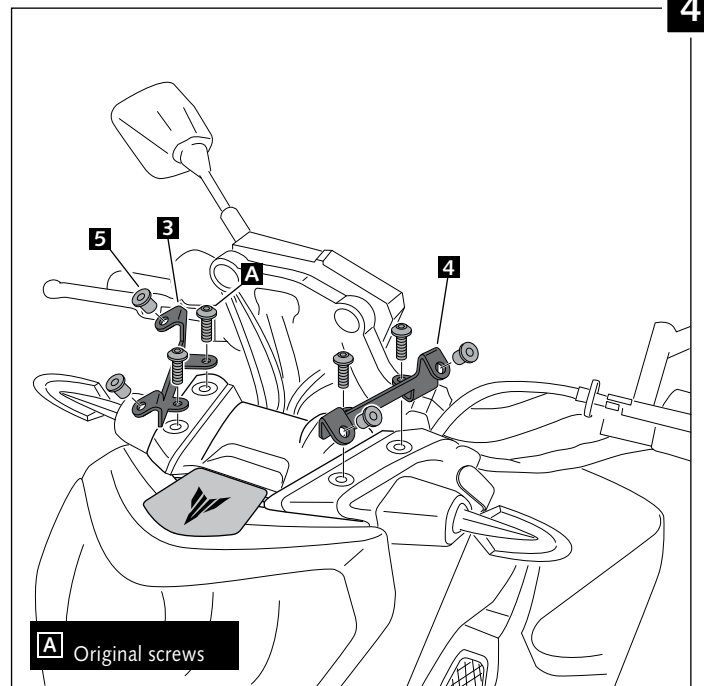


4

A Original screws

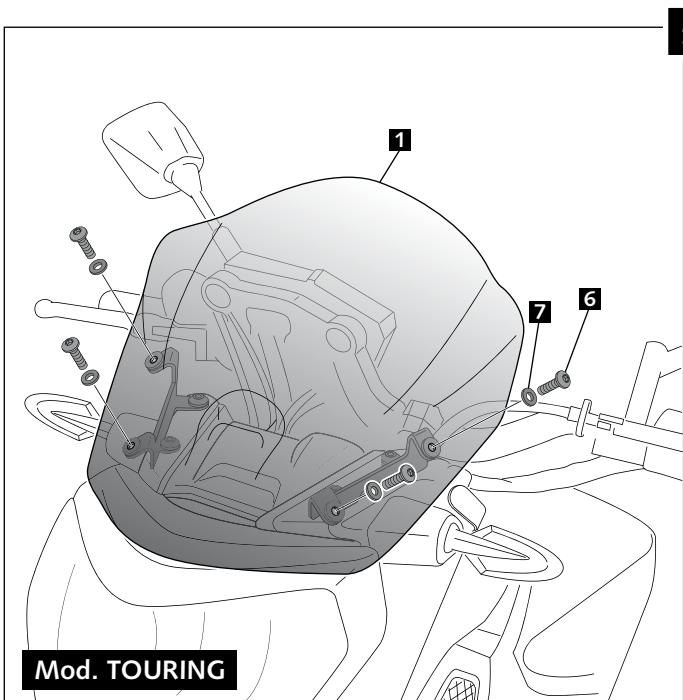

5

Mod. TOURING

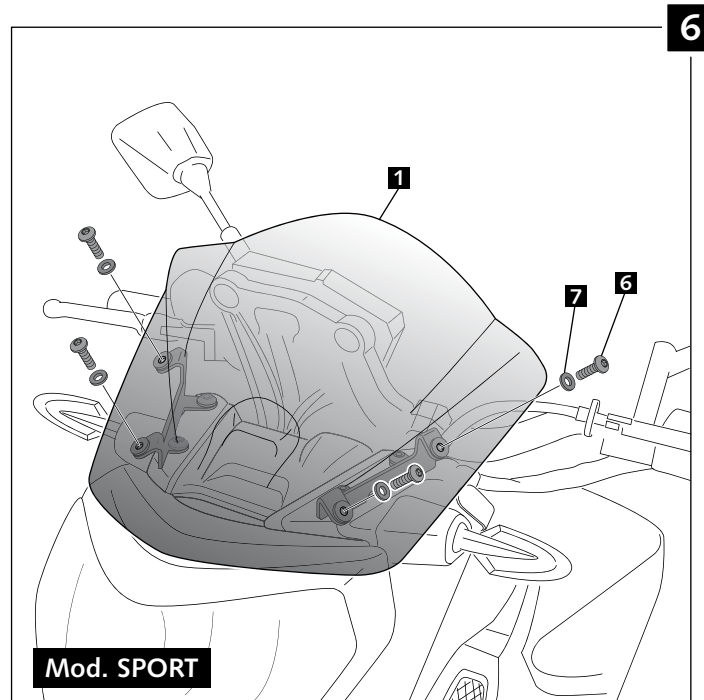

6

Mod. SPORT

TIPS FOR A CORRECT WINDSCREEN ASSEMBLY

Due to storage and transport processes of the windscreens, which are subjected to positions and temperature changes out of our control, this may produce small deformations on the material causing some difficulties on the mounting process. It is recommended to:

- 1- Place the screws on one side without tighten all the way.
- 2- Stretch the windscreen to the other side (see Fig. 1). The flexibility of the material allows this stretch with no risk of breaking or cracking.
- 3- Place the screws without tightening all the way.
- 4- Tighten progressively all the screws.

