SENA

10Upad for HJC IS-17
Quick Start Guide



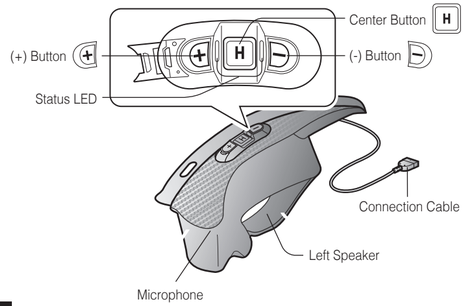

18.Apr

Installation

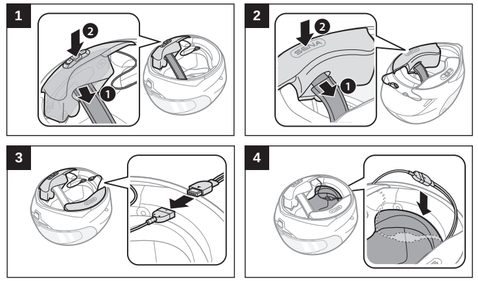

Charging

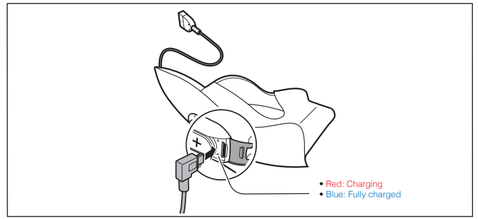

Button Operation

Tap — Tapping

Tap Tap — Double Tapping

1" — Press for 1 sec

5" 12" — Press and Hold

Power On/Off

\+ H — 1" Press

Volume Adjustment

\+ or − — Tap

Battery Check

Power On

	LED
70 ~ 100%	■ - ■ - ■■■■ - ■ ···
30 ~ 70%	■ - ■ - ■■■ - ■ ···
0 ~ 30%	■ - ■ - ■■ - ■ ···

Phone, Music Pairing

H — 10" Press — Tap

LED ■■■■

Select **Sena 10Upad**

Enter 0 0 0 0 PIN

Music Operation

▶ / ❚❚ — H — 1" Press

◀◀ — − — 1" Press

▶▶ — + — 1" Press

Mobile Phone Call Making and Answering

Answer — H — Tap

End — H — 2" Press

Voice Dial — H — 3" Press

Speed Dial — + — 3" Press

Reject — H — 2" Press

Intercom Pairing

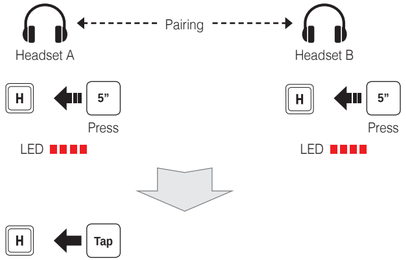

Intercom Start/End

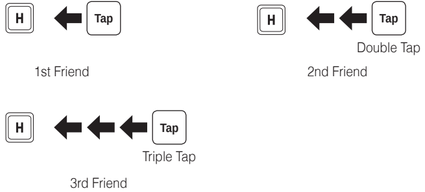

Radio On/Off

Radio Seek Stations



Radio Scan Up FM Band

Save to preset while scanning

Radio Move to Preset Station



Radio Save or Delete Preset

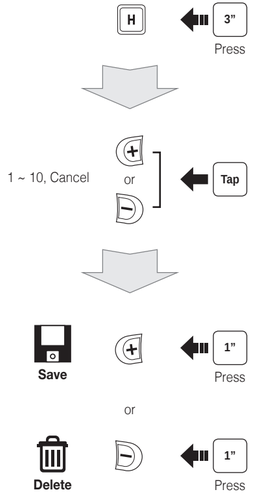

Setting

Configuration Menu

Using the Sena Device Manager

Connect the headset to your computer via a USB cable. Launch the Sena Device Manager and click **DEVICE SETTING** to configure the headset settings.
For details about downloading the Sena Device Manager, please refer to the leaflet included in the package.

Using the Sena Smartphone App

1. On your smartphone, download the Sena Smartphone App for Android or iPhone from Google Play or App Store.
2. Pair your smartphone with the headset.
3. Run the Sena Smartphone App. Swipe the screen to the right and tap Setting to configure the headset settings.

Troubleshooting

Factory Reset

If you want to restore the 10Upad to factory default settings, use the Factory Reset in the configuration menu. The headset automatically restores the default settings and turns off.

Fault Reset

If the 10Upad is not working properly for any reason, reset by gently pushing the pin-hole reset button located next to the DC Power Charging & Firmware Upgrade Port.



10Upad for HJC IS-MAX2
Quick Start Guide



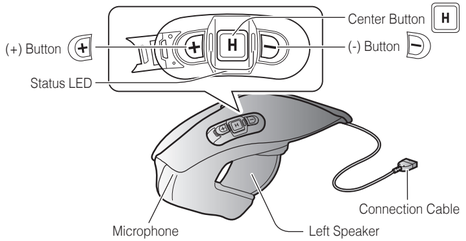

18.Apr

Installation

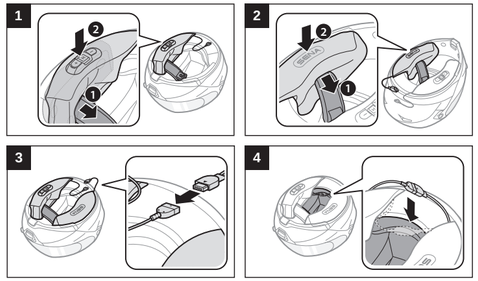

Charging

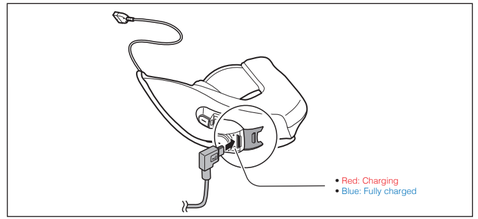

Button Operation

- Tap — Tapping
- 1" — Press for 1 sec
- Tap Tap — Double Tapping
- 5" 12" — Press and Hold

Power On/Off

(+) + H — 1" Press

Volume Adjustment

(+) or (-) — Tap

Battery Check

Power On

	LED
70 ~ 100%	■ - ■ - ■■■■ - ■ ···
30 ~ 70%	■ - ■ - ■■■ - ■ ···
0 ~ 30%	■ - ■ - ■■ - ■ ···

Phone, Music Pairing

H — 10" Press — (+) Tap

LED ■■■■

Select **Sena 10Upad**

Enter 0 0 0 0 PIN

Music Operation

▶ / ❚❚	H 1" Press
◀◀	(-) 1" Press
▶▶	(+) 1" Press

Mobile Phone Call Making and Answering

Answer	H Tap
End	H 2" Press
Voice Dial	H 3" Press
Speed Dial	(+) 3" Press
Reject	H 2" Press

Intercom Pairing

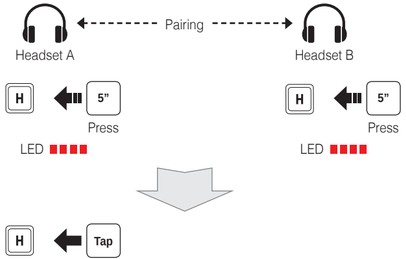

Intercom Start/End

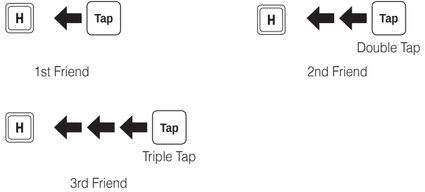

Radio On/Off

Radio Seek Stations



Radio Scan Up FM Band

Save to preset while scanning

Radio Move to Preset Station



Radio Save or Delete Preset

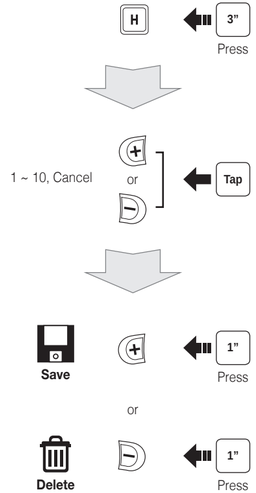

Setting

Configuration Menu

Using the Sena Device Manager

Connect the headset to your computer via a USB cable. Launch the Sena Device Manager and click **DEVICE SETTING** to configure the headset settings.
For details about downloading the Sena Device Manager, please refer to the leaflet included in the package.

Using the Sena Smartphone App

1. On your smartphone, download the Sena Smartphone App for Android or iPhone from Google Play or App Store.
2. Pair your smartphone with the headset.
3. Run the Sena Smartphone App. Swipe the screen to the right and tap Setting to configure the headset settings.

Troubleshooting

Factory Reset

If you want to restore the 10Upad to factory default settings, use the Factory Reset in the configuration menu. The headset automatically restores the default settings and turns off.

Fault Reset

If the 10Upad is not working properly for any reason, reset by gently pushing the pin-hole reset button located next to the DC Power Charging & Firmware Upgrade Port.

Looking for motorcycle communication systems? Visit our website.