
Take apart and reject the handle lids (A). Take apart and reject the screws (B) from the back handles (C).

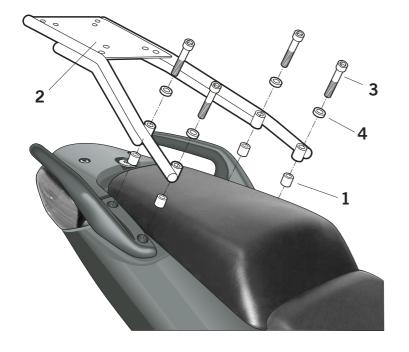

Place the separators (1).
Assemble the KIT TOP support (2) with the separators (1), screws (3) and washers (4).

PARTS .