



### ***Instructions for use***

Thank you for purchasing your new SHOEI helmet. This manual contains valuable information to help you understand how to operate and maintain your helmet. Please read this manual carefully before use and keep it for future reference. Your SHOEI dealer can provide a replacement if this manual is lost.



<b>Read This First</b>	<b>3</b>
<b>Confirm the Packed Items</b>	<b>4</b>
<b>Parts Description</b>	<b>5</b>
<b>Shield / Visor Adjustment Mechanism</b>	<b>6</b>
<b>Removing the CJ-3 Shield / Visor</b>	<b>7</b>
<b>Installing the CJ-3 Shield / Visor</b>	<b>8</b>
<b>Important Notice about Handling the CJ-3 Shield / Visor</b>	<b>9</b>
<b>Replacing Interior Parts</b>	<b>10</b>
<b>Removing Interior Parts</b>	<b>11</b>
<b>Installing Interior Parts</b>	<b>12</b>
<b>Important Notice about Handling Interior Parts</b>	<b>13</b>
<b>WARNING</b>	<b>14</b>
<b>Parts List</b>	<b>14</b>

## Read This First

### **This product is a motorcycle helmet.**

Do not use it for any purposes other than riding a motorcycle. If you use the helmet for any other purpose, it may not provide sufficient protection in case of an accident.

### **No helmet can protect the wearer against all foreseeable high speed and low speed impacts.**

For maximum head protection, the helmet must fit properly and the retention system must be securely fastened under the chin. The helmet should allow sufficient peripheral vision when secure on your head. If your helmet is too large, it may slip or move on your head while riding. This could cause your helmet to come off in an accident or obstruct your vision while riding resulting in personal injury or death. To learn to properly wear and secure your helmet, see the booklet "How to Use Your Helmet Properly" that is packed with your helmet.

The contents of this manual are subject to change without notice.


The illustrations in this manual may differ from the actual product.

The copyrights for this manual belong to SHOEI CO., LTD. Reproduction or copying of this manual without written permission is strictly prohibited.

## Confirm the Packed Items


After opening the product box, please confirm that all parts and accessories are included.

1. Helmet
2. Helmet Bag
3. Instruction Manual
4. "How to use your helmet properly"
5. Warning label (E-3 tag: for ECE R22 Products)
6. J•O logo stickers

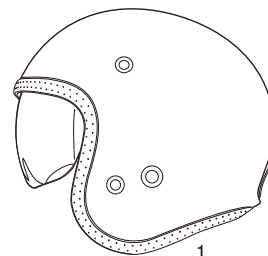

We recommend that you save the box and its cushioning material in case you need to ship the product or its parts for repair. If you dispose of these materials, please follow the proper laws and regulations.



Right | Left





The terms "right" and "left" in this manual are from the point of view of a rider who is wearing the helmet.

## Parts Description

1. CJ-3 Shield / Visor
2. Shield / Visor Rail
3. Shell
4. Impact Absorbing Liner
5. Goggle band
6. Chinstrap

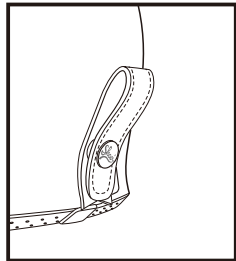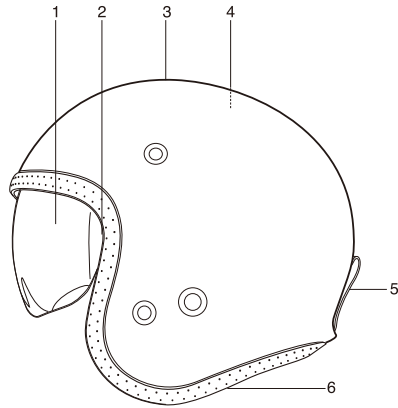


Goggle band

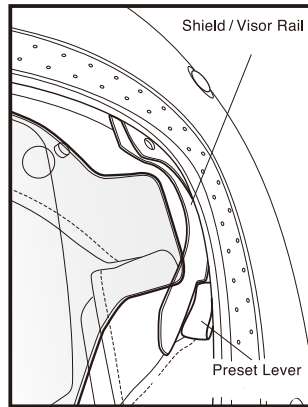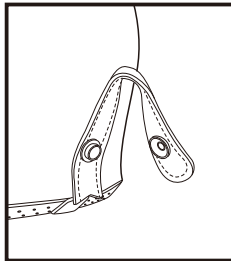


Shield/Visor Rail

## Shield / Visor Adjustment Mechanism


The position of the preset lever can be adjusted in 3 steps, which adjusts the position of the bottom end of the shield/visor as per drawing below.

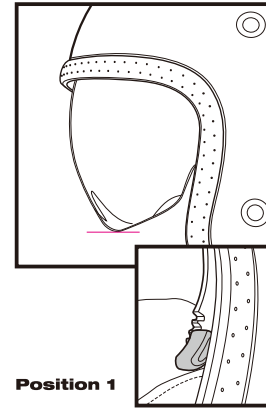

Position 1

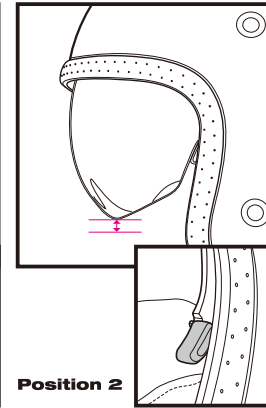



Position 2

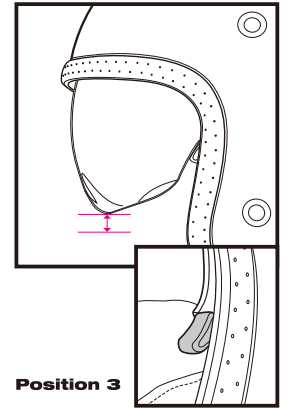

Position 3


For changing height of the preset lever, open a shield/visor, push the preset lever to outside slightly and move it to the gear of the required position.

**When adjusting the position of the preset lever, make sure to adjust the both sides to the same position.**

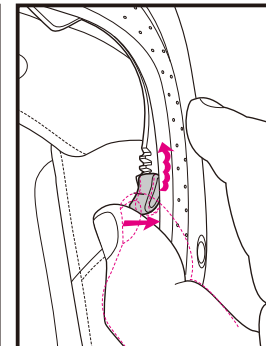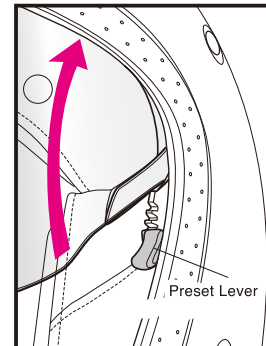


## Removing the CJ-3 Shield / Visor

**!** Before using the helmet for the first time after purchase, remove cushion material from the gap between the shell and the liner.

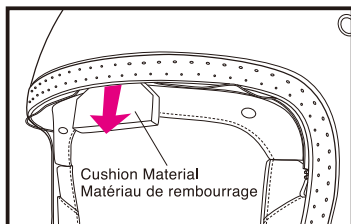


Move preset levers of both sides to the position 0, lower position than the position 1 (under the lowest gear) as per Drawing 1. Close the shield / visor, lift the catch A slightly and unclasp the hook as per Drawing 2. Draw the shield / visor out from the shield / visor rail as per Drawing 3. (When lifting the catch by hand is difficult, use a flat tool such as a flat-head screwdriver covered with soft cloth.)

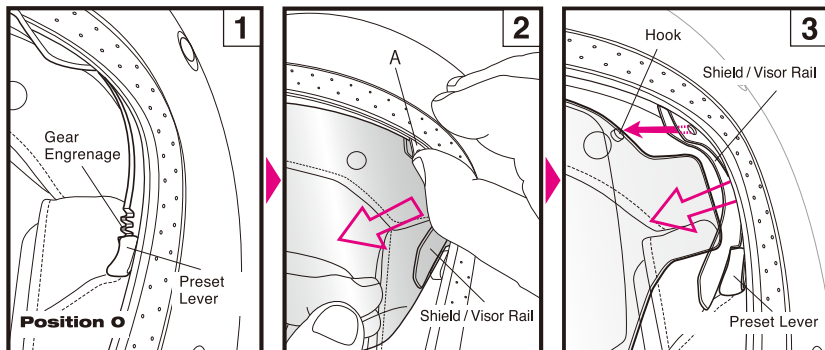


**!** Do not leave the preset lever in the position 0 (the lower position than the position 1). The lever may be deformed.

## Installing the CJ-3 Shield / Visor


Adjust preset levers of both sides to the position 0 as per Drawing 4. Insert the shield / visor to the shield / visor rail, and fix the hook to the hole on A as per Drawing 5.

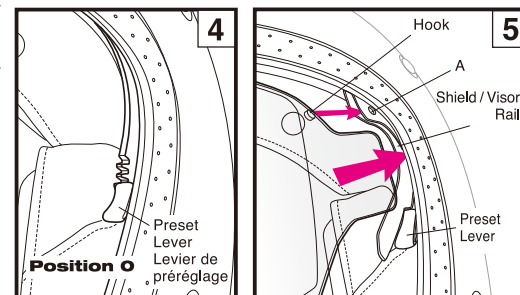

When the shield / visor rail goes into the gap between the shell and the liner (the shield / visor housing space) like Drawing A, insert a tool such as a flat-head screwdriver covered with soft cloth into the shield / visor housing area and get the shield / visor rail down.

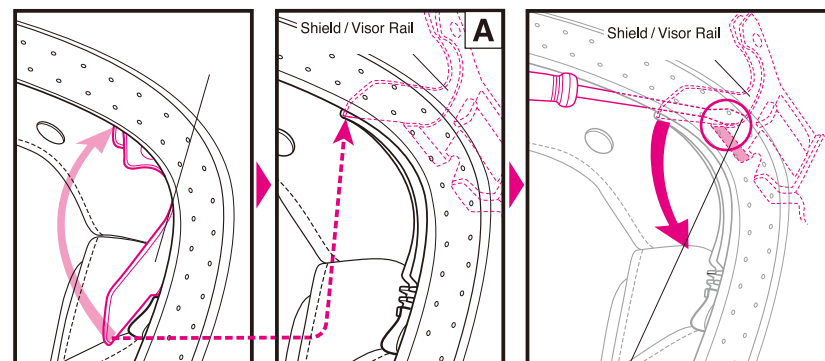


The Shield / Visor Housing Area of Shield / Visor Rail



### Important Notice about Handling the CJ-3 Shield / Visor

1. When the shield/visor gets wet, remove the shield /visor. Dry it well and fix to the helmet.
2. Dirt and scratches on the shield/visor may obstruct your view while riding and can be very dangerous! If the CJ-3 shield/visor gets dirty or scratched, stop using it immediately. Remove the shield/visor and clean or replace it.
3. The CJ-3 shield/visor should be cleaned with a solution of mild, neutral soap and water. Rinse well with pure water then wipe dry with a soft cloth. **Do not use any of the following cleaning materials: hot water over 40°C; salt water; any acidic or alkali detergent; benzine, thinner, gasoline, or other organic solvents; glass cleaner; or any cleaner containing organic solvents.** If any of these cleaners are used, the shield's/visor's chemical nature may be altered and safety may be hindered.
4. Do not ride with a shield/visor that is fogged. This may obstruct your view and can be very dangerous. If the CJ-3 shield/visor is fogged, open the shield/visor to circulate air within the helmet and remove the fog from the shield/visor.
5. Do not place any sticker or tape in the shield's/visor's field of vision.

### Replacing Interior Parts

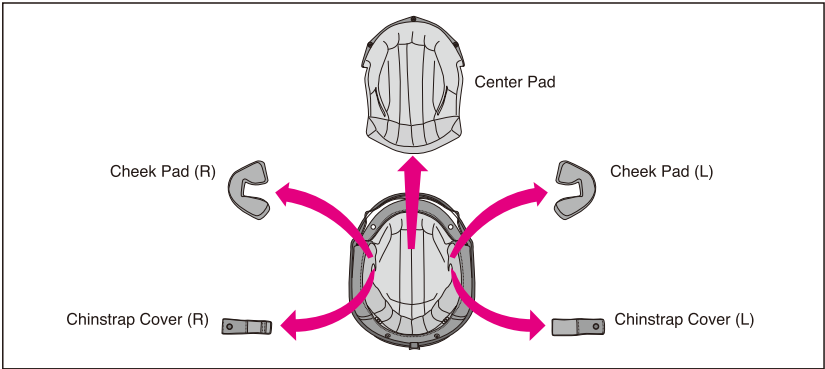

The center pad, the right and left cheek pads and chinstrap covers can be removed for washing. You can also adjust the fit of your helmet by switching to the optional pads. Look at the list and drawing of interior parts and check whether the parts are installed or removed. Be sure to always fix the center pad, cheek pads, and chinstrap covers prior to riding. If necessary, use the following table to order the proper interior parts to adjust the fit of your helmet.

■ Pad Sizes

		XS	S	M	L	XL	XXL
J-O Center Pad J-O Coussinet central (bonnet)	Optional (firm fit)	S17	S13	M13	L13	XL13	XL9
	<b>Standard</b>	<b>S13</b>	<b>S9</b>	<b>M9</b>	<b>L9</b>	<b>XL9</b>	<b>XL5</b>
	Optional (loose fit)	S9	S5	M5	L5	XL5	—
J-O Cheek Pad J-O	Optional (firm fit)	43	39				35
	<b>Standard</b>	<b>39</b>	<b>35</b>				<b>31</b>
Coussinet maxillaire	Optional (loose fit)	35	31				—

- The same cheek pads can be used with all helmet sizes. For the M size helmet example, choose cheek pad size 31 if you want a looser fit and size 39 for a firmer fit (both are optional parts).
- Center pads will vary by model size. Confirm the size of your helmet prior to making a purchase.

\* Model name and specification vary depending upon country or area.

## Removing Interior Parts

### 1. Removing the Cheek Pads

Unfasten the 3 snaps to remove the pad from the cheek pad base (Drawing 1).







### 2. Removing the Center Pad

Remove the center pad by unsnapping 2 points at the rear of the helmet first (Drawing 2).

Unfasten the hook of the front area of the center pad, and draw out the plate as per Drawing 3.


### 3. Removing the Chinstrap Covers

Remove the cheek pad then unfasten the chinstrap cover snap. Remove the cover from the chinstrap (Drawing 4). Remove the other chinstrap cover in the same manner.

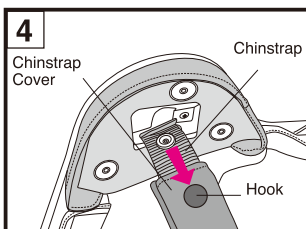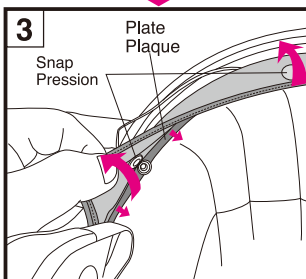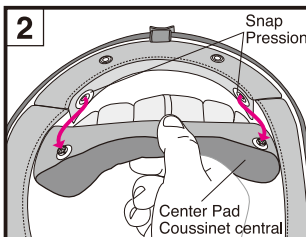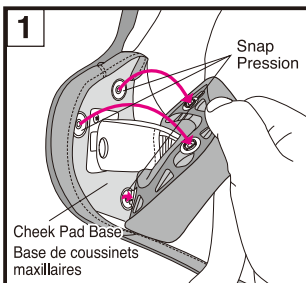

#### English



Do not touch the screw on the cheek pad base. The parts inside of the helmet may come off. (The red arrowed screw in the drawing.)



## Installing Interior Parts



### 1. Installing the Chinstrap Covers

The chinstrap covers have different shapes on the right and left sides of the helmet. Pass the chinstrap through a chinstrap cover and snap each other until you hear it clicks (Drawing 5).

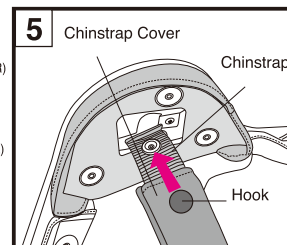






### 2. Installing the Center Pad

Flip up the cover of the front part, and insert the front plate of the center pad. Insert both ends of the front plate not to stick out of the cover as per Drawing A. Fasten 3 positions by hooks as per Drawing 6. Snap 2 hooks into place in the rear area of the center pad as per Drawing 7.

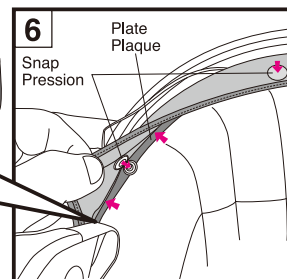

### 3. Installing the Cheek Pads

Before installing the cheek pads, make sure that the 3 hooks are positioned as per Drawing 8. They may not be hooked if they are not positioned properly. Identify right and left pads. Pass the chinstrap through the hollow section of the cheek pad, and fasten the 3 snaps. Install the other cheek pad in the same manner.

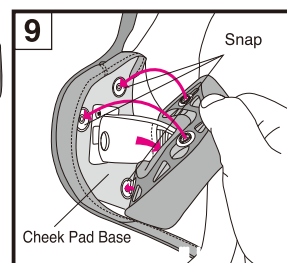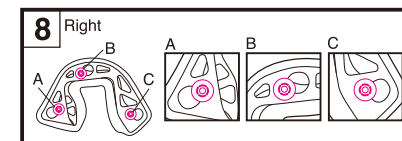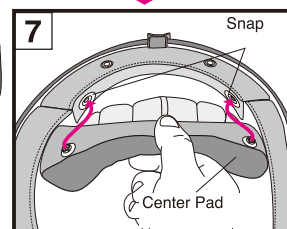

## Important Notice about Handling Interior Parts

1. When fastening or unfastening the snaps, you should hold near the snaps and treat carefully. Fasten the snaps firmly until they click in place.
2. You can clean the inner parts by hand washing them or by washing them in a washing machine after placing them in a laundry net. Please treat them carefully when washing. Use lukewarm water. Gently squeeze the parts with a dry towel and dry them in the shade. To prevent damage to the plastic areas of the interior parts, do not wring them strongly and do not fold or bend the plastic areas. Take special care if you are using a washing machine. Do not dry the interior parts with a clothes dryer, blow dryer, or any other type of mechanical dryer, as heat can damage the material. The impact absorbing liner (polystyrene foam section) should be wet with a soft cloth dipped in a solution of mild neutral soap and water and then wiped. Allow time for the impact absorbing liner to dry in the shade. Do not dry the impact absorbing liner in the sunlight or use any type of mechanical dryer, as the impact absorbing liner is extremely sensitive to heat. If the impact absorbing liner is exposed to high heat of any kind, contact your dealer or SHOEI directly for a safety evaluation. To prevent damage, **do not use any of the following cleaning materials: hot water over 40°C; salt water; any acidic or alkali detergent; benzine, thinner, gasoline, or other organic solvents; glass cleaner; or any cleaner containing organic solvents.**

## WARNING

1. Before use, check that the shield/visor hooks and gears are fit firmly.
2. Be sure to always wear the center pad, cheek pads, and chinstrap covers when using the helmet.
3. When cleaning and caring for the helmet and shield/visor, **do not use any of the following cleaning materials: hot water over 40°C; salt water; any acidic or alkali detergent; benzine, thinner, gasoline, or other organic solvents; glass cleaner; or any cleaner containing organic solvents.** If any of these cleaners are used, the helmet's chemical nature may be altered and safety may be hindered.
4. If insects become stuck to the helmet during riding and are left in place, the helmet surface may be corroded. They should be removed promptly.
5. Be sure to use SHOEI genuine parts when replacing the shield / visor or inner parts.
6. Do not carry the helmet holding the goggle band.

## Parts List

These optional parts are available for repair or replacement.

To replace the parts, read the instruction manual that comes packed with the parts.

- C-J-3 Shield/Visor
- J · O Center Pad
- J · O Cheek Pad(right and left)
- J · O Chinstrap Cover(right and left)