


5102-00/5103-00 KICKSTAND INSTALLATION

2007-2015 HONDA CRF150R/RB

5102-PK CONTENTS:

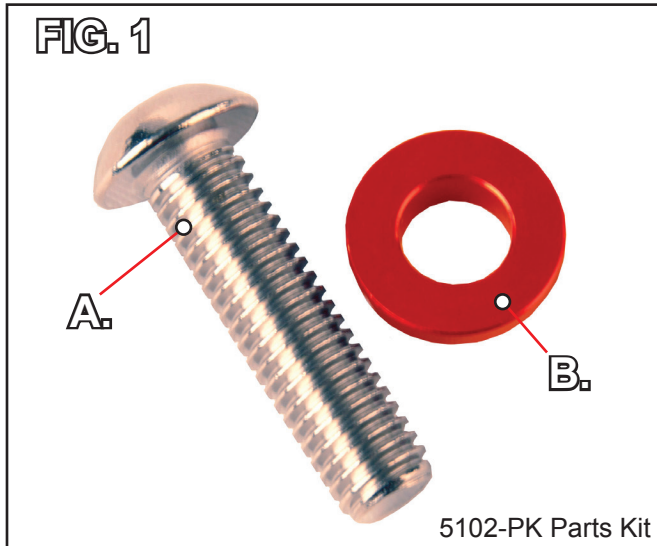


- A. M8x30mm BHCS.
B. Bracket Spacer.

HONDA INSTALLATION:

● HONDA CRF150R/RB 2007-2015

1. Remove stock sub-frame fastener on shifter side of the bike.
2. Insert provided bracket spacer (Fig. 1B) into the front side of kickstand bracket as shown in Fig. 2.
3. Re-install stock subframe fastener through provided Trail Tech kickstand bracket.
4. Insert provided M8x30mm (Fig. 1A) BHCS through provided shoulder bracket spacer & Trail Tech kickstand bracket.

Note: Tighten both fasteners to manufacturer torque specification.

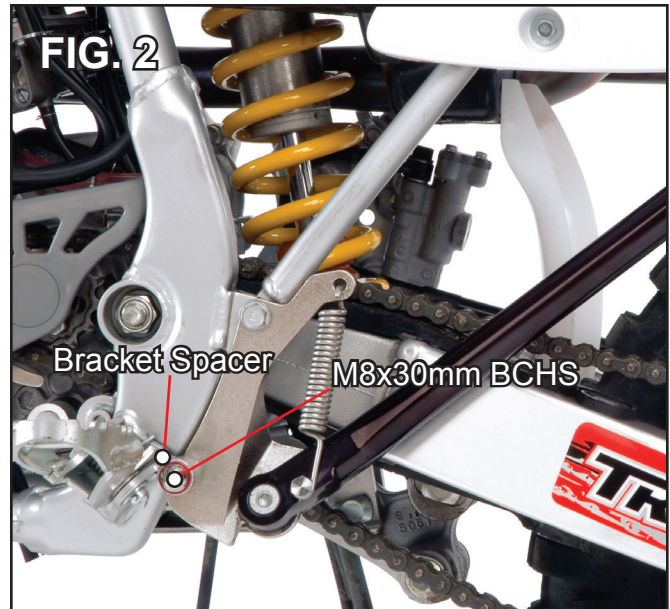

Kickstand Installed

IMPORTANT: WEAR EYE PROTECTION WHEN HANGING SPRINGS!

Note: After every ride it is important to check your kickstand thoroughly for the following:


- Loose or damaged bolts
- Bent or damaged kickstand leg or bracket
- Damaged spring

Damaged or broken parts can result in serious injury! If any part of your stand has become damaged do not ride the machine! Contact a factory trained technician or Trail Tech directly for service or repairs.

5104-00/5104-10 & 5105-00/5105-10 KICKSTAND INSTALLATION

2009-2014 CRF450R, 2010-2014 CRF250R

5104-PK CONTENTS:

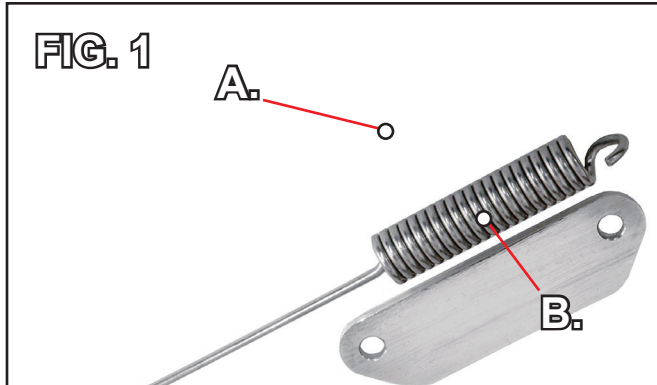

5104-PK Parts Kit

- A. 5905-04 CR/CRF Kickstand Spring.
 B. Spring Hanger Tab.

HONDA INSTALLATION:

- HONDA CRF250R 2010-2013
- HONDA CRF250R 2014
- HONDA CRF450R 2009-2013


1. Remove stock foot-peg, foot-peg hardware, & foot-peg hanger from frame.
2. Install provided Trail Tech foot-peg hanger, using the OEM fasteners.

Note: Use thread locking compound and manufacturer torque specification during installation.

3. Re-install foot peg & foot-peg hardware.
4. Remove the stock side panel fastener and insert the provided spring hanger tab (Fig. 1B)
5. Re-install the side panel fastener.

Note: Tighten down hand tight to start. Do not tighten down to manufacturer torque specification until spring is hung. Failure to do so may cause your spring to bind or break during use!

6. Hook spring into spring hanger mounting tab as shown in (Fig. 2).
7. Using safety glasses & a spring puller stretch the spring and latch it onto the stand arm mounting point (Fig. 2).
8. Tighten sub-frame fastener to manufacturer torque specification.

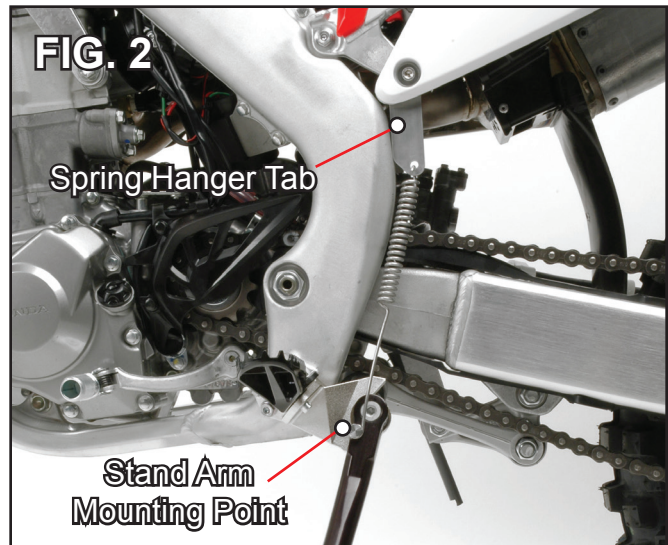

Kickstand Installed



5105-PK Parts Kit

For use with 2014 Honda CRF250R

IMPORTANT: WEAR EYE PROTECTION WHEN HANGING SPRINGS!

Note: After every ride it is important to check your kickstand thoroughly for the following:

- Loose or damaged bolts
- Bent or damaged kickstand leg or bracket
- Damaged spring

Damaged or broken parts can result in serious injury! If any part of your stand has become damaged do not ride the machine! Contact a factory trained technician or Trail Tech directly for service or repairs.