

KICKSTAND INSTALLATION

5002-YZ/WR
 '98-'04 YZ/WR 250F/450F,
 '98-'01 YZ 125/250

5200-PK CONTENTS:




YAMAHA INSTALLATION:

- YAMAHA YZ/WR 250F/450F '98-'04
- YAMAHA YZ 125/250 '98-'01

1. Attach mounting bracket to frame as shown below using provided bolts.
2. Hang spring as shown below.
3. Use thread locking compound on the pivot bolt to ensure it does not back out.

Note: Bracket for YZ125/Y250 02 and up is different from bracket shown, but will install the same.

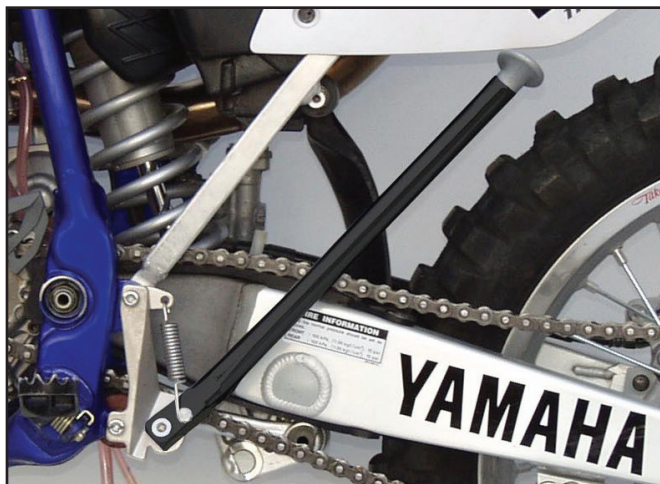

5002-YZ/WR Kickstand Installed

5201-00 & 5202-00
 '02-'04 YZ125/250 (2-STROKE)
 '05-'17 YZ125/250 (2-STROKE)


5201-PK CONTENTS:



YAMAHA INSTALLATION:

- YZ125/250 (2-Stroke) '02-'04
- YZ125/250 (2-Stroke) '05-'17

1. Attach mounting bracket to frame as shown below using provided bolts.
2. Hang spring as shown below.
3. Use thread locking compound on the pivot bolt to ensure it does not back out.

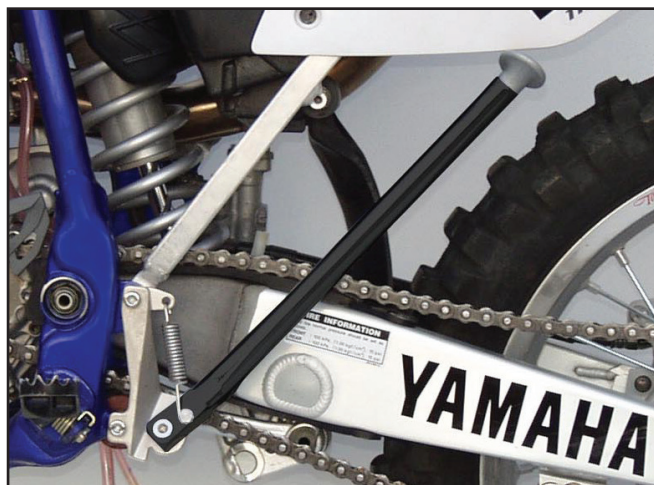

5002-YZ/WR Kickstand Installed

IMPORTANT: WEAR EYE PROTECTION WHEN HANGING SPRINGS!

Note: After every ride it is important to check your kickstand thoroughly for the following:

- Loose or damaged bolts
- Bent or damaged kickstand leg or bracket
- Damaged spring

Damaged or broken parts can result in serious injury! If any part of your stand has become

damaged do not ride the machine! Contact a factory trained technician or Trail Tech directly for service or repairs.