

KICKSTAND INSTALLATION KAWASAKI

- 06-17 KAWASAKI KXF250
- 07-17 KAWASAKI KXF450
- 07-08 KAWASAKI KX450
- 07-09 KAWASAKI KLX450


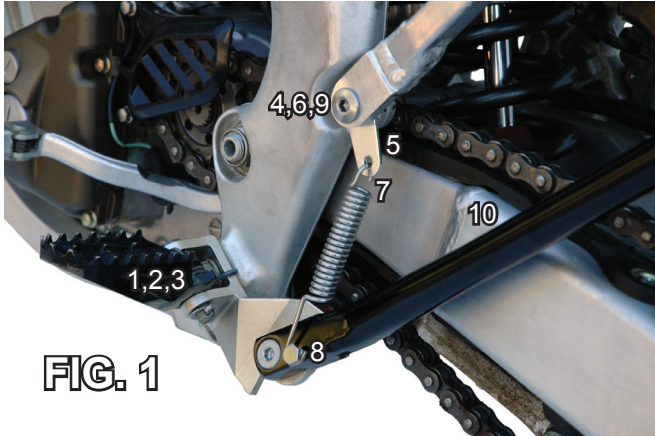


FIG. 1

2007-2011 Kawasaki KX450F Kickstand Installed

1. Remove stock foot-peg, foot-peg hardware, and foot-peg hanger from frame.
2. Install provided Trail Tech foot-peg bracket, using the OEM fasteners. *(Use thread locking compound and tighten to OEM torque specifications.)*
3. Re-install foot peg and foot-peg hardware following manufacturers recommended installation procedure.
4. Remove the stock left sub-frame bolt.
5. Install spring hanger tab as shown. (Fig 1)
6. Re-install the sub-frame bolt, hand tight to start.
Note: Do not tighten down to manufacturers torque specification until spring is hung. Failure to do so may cause your spring to bind or break during use!
7. Hook spring into spring hanger tab. (Fig. 1)
8. Using safety glasses & a spring puller stretch the spring and latch it onto the stand arm mounting point. (Fig. 1)
9. Tighten sub-frame bolt to manufacturers torque specification.
10. Make sure the kickstand swings in a full arc without interfering with the swing arm or side plate.

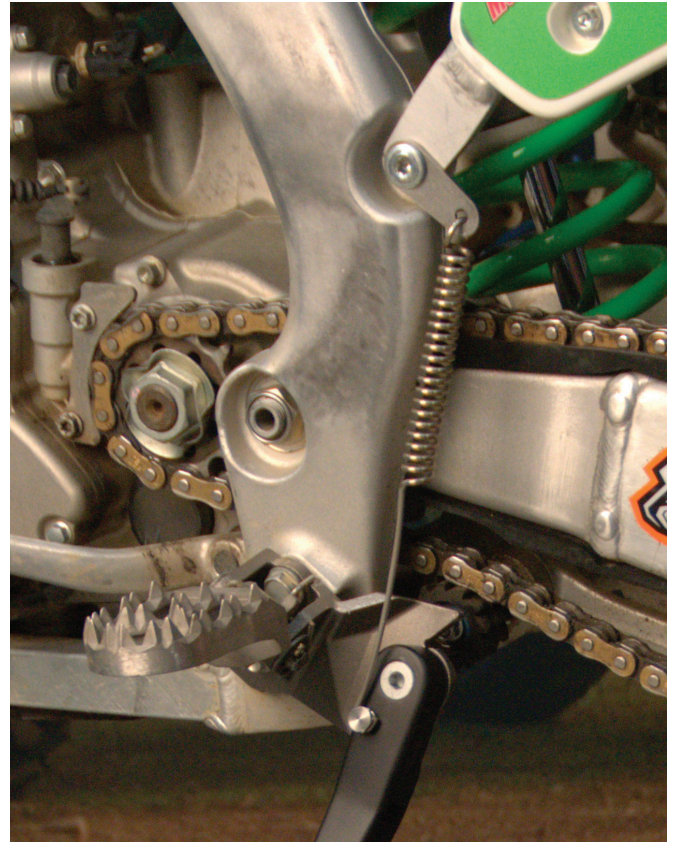

2012-2017 Kawasaki KX450F Kickstand Installed

IMPORTANT: WEAR EYE PROTECTION WHEN HANGING SPRINGS!

Note: After every ride it is important to check your kickstand thoroughly for the following:

- Bent or damaged kickstand leg or bracket
- Loose or damaged bolts • Damaged spring

Damaged or broken parts can result in serious injury!
If any part of your stand has become damaged do not ride the machine! Contact a factory trained technician or Trail Tech directly for service or repairs.