


5501-00 KICKSTAND INSTALLATION

07-09 SUZUKI RMZ250
06-07 SUZUKI RMZ450

5501-00

- 07-09 SUZUKI RMZ250
- 06-07 SUZUKI RMZ450

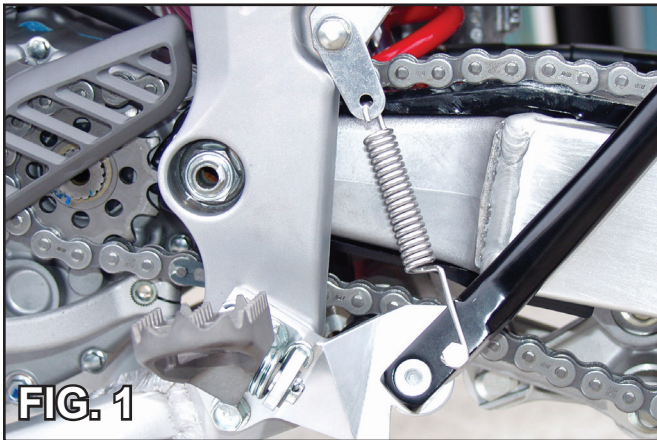

2007 Suzuki RMZ450 Kickstand Installed

1. Remove stock foot-peg, foot-peg hardware, & foot-peg hanger from frame.
2. Install provided Trail Tech foot-peg bracket, using the OEM fasteners. *(Use thread locking compound on the pivot bolt to ensure it does not back out.)*
3. Re install foot peg & foot-peg hardware following manufacturers recommended installation procedure.
4. Remove the stock side panel fastener and insert through the provided spring hanger tab. (Fig 1)



5. Re-install the side panel fastener, and tighten down hand tight to start.

Note: Do not tighten down to manufacturers torque specification until spring is hung. Failure to do so may cause your spring to bind or break during use!

6. Hook spring into spring hanger mounting tab shown in (Fig. 2)
7. Using safety glasses & a spring puller stretch the spring and latch it onto the stand arm mounting point. (Fig. 2)
8. Tighten sub-frame fastener to manufacturers torque specification.



IMPORTANT: WEAR EYE PROTECTION WHEN HANGING SPRINGS!

Note: After every ride it is important to check your kickstand thoroughly for the following:

- Loose or damaged bolts
 - Bent or damaged kickstand leg or bracket
 - Damaged spring
- Damaged or broken parts can result in serious injury! If any part of your stand has become damaged do not ride the machine! Contact a factory trained technician or Trail Tech directly for service or repairs.


Continued on other side >>

5502-00 KICKSTAND INSTALLATION

10-16 SUZUKI RMZ250
08-16 SUZUKI RMZ450


5502-00

- 10-16 SUZUKI RMZ250
- 08-16 SUZUKI RMZ450

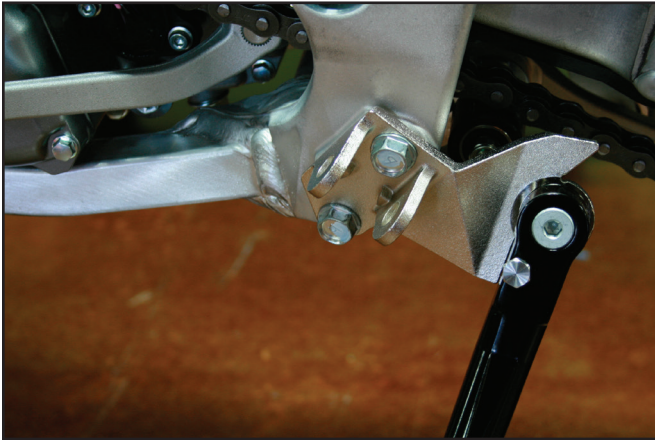

2010 Suzuki RMZ250 Kickstand Installed

1. Remove stock foot-peg, foot-peg hardware, & foot-peg hanger from frame.
2. Install provided Trail Tech foot-peg bracket, using the OEM fasteners. *(Use thread locking compound on the pivot bolt to ensure it does not back out.)*
3. Re install foot peg & foot-peg hardware following manufacturers recommended installation procedure.
4. Remove the stock side panel fastener and insert through the provided spring hanger tab.

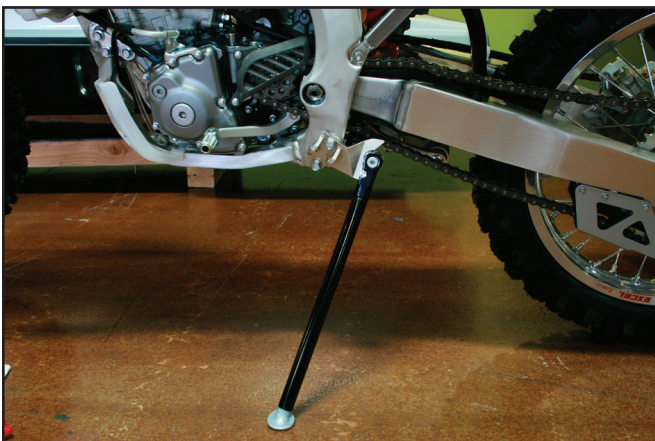

5. Re-install the side panel fastener, and tighten down hand tight to start.

Note: Do not tighten down to manufacturers torque specification until spring is hung. Failure to do so may cause your spring to bind or break during use!

6. Hook spring into spring hanger mounting tab.
7. Using safety glasses & a spring puller stretch the spring and latch it onto the stand arm mounting point.
8. Tighten sub-frame fastener to manufacturers torque specification.



IMPORTANT: WEAR EYE PROTECTION WHEN HANGING SPRINGS!

Note: After every ride it is important to check your kickstand thoroughly for the following:

- **Loose or damaged bolts** • **Bent or damaged kickstand leg or bracket** • **Damaged spring**
- Damaged or broken parts can result in serious injury! If any part of your stand has become damaged do not ride the machine! Contact a factory trained technician or Trail Tech directly for service or repairs.