


MOTORCYCLE CHAINS

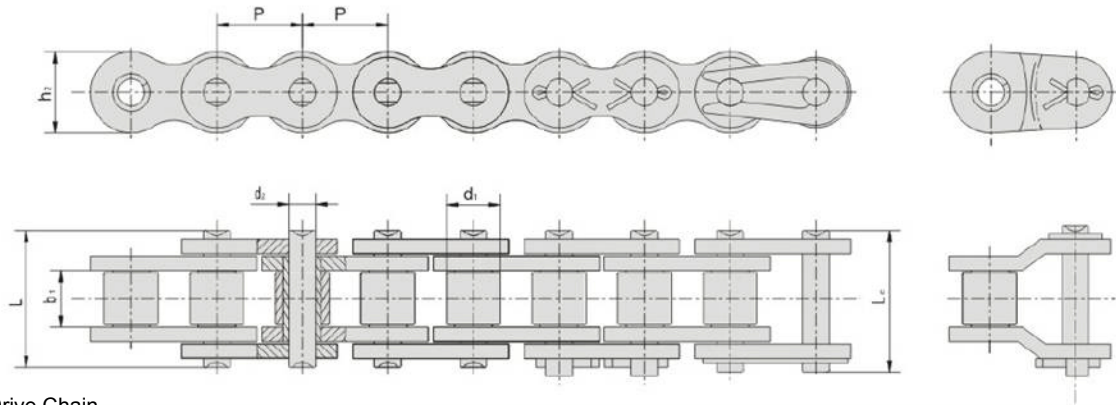

Universal Sport Bike Style Drive Chain

UNIBEAR Chain No.	Pitch	Plate depth	Plate thickness	Width between inner plate	Roller diameter	Pin diameter	Pin length		Ultimate tensile strength	Weight per meter
	P mm	H(Max) mm	T1(Max) mm	b1(Min) mm	d1(Max) mm	d2(Max) mm	L(Max) mm	Lc(Max) mm	Q(Min) KN	q kg/m
T417H	12.7	11.74	1.7	7.94	8.51	4.45	17.6	18.9	20.6	0.78
T418H	12.7	11.74	1.8	7.94	8.51	4.45	17.6	18.9	20.6	0.78
081-Y1	12.7	9.91	1	4.88	7.75	3.66	11	/	8.4	0.36
083T1	12.7	9.9	1/1.2	4.88	7.75	3.96	11.7	12.9	6.6	0.43
083-Y1	12.7	10.4	1.3	4.88	7.77	4.08	12.4	13.5	11.6	0.4
083-Y2	12.7	9.5	1.1	5	7.77	4.07	12.4	/	6	0.38
083-Y3	12.7	11.74	1.03/1.3	5	7.77	3.96	11.9	13.4	11	0.47
083-Y4	12.7	10.4	1.3/1.4	4.88	7.75	4.08	12.85	14	12	0.45
O84	12.7	11.15	1.8	4.88	7.75	4.09	14.8	16	16	0.64
O86	12.7	11.8	1.5/1.6	5.6	8.51	4.45	14.5	16.1	18.2	0.66
415	12.7	10.4	1.3	4.88	7.75	3.96	12.5	13.9	11.6	0.56
415-Y1	12.7	11	1/1.3	5	7.76	3.96	12.3	/	11	0.51
415B	12.7	10.3	1.3	4.88	7.75	4.08	12.9	13.9	12	0.44
415B-F1	12.7	10.3	1	4.88	7.75	4.08	11.5	12.6	9	0.38
415B-F2	12.7	10.4	1.2	4.8	7.77	4.08	12	13.5	9	0.41
415H	12.7	12	1.5	4.88	7.75	3.96	13.1	14.5	15.6	0.55
514	12.7	19.7	3	12.7	14	7	28.4	30.8	45	1.86
420	12.7	12	1.5	6.3	7.77	3.96	14.5	15.8	16	0.55
420H	12.7	12	1.8	6.35	7.77	3.96	15.7	17.1	17	0.69
420-F3	12.7	12	1.5	6.35	7.77	3.99	14.5	/	16	0.62
420H-YB	12.7	12	1.8	6.35	7.77	3.96	15.7	/	17	0.67
428	12.7	11.8	1.58	7.85	8.51	4.45	16.5	18.05	17.8	0.73
428H	12.7	12	2.03	7.85	8.51	4.45	18.3	19.6	20.6	0.77
428HW	12.7	12.3	2.03	7.75	8.51	4.45	18.3	19.8	20.6	0.91
428HT	12.7	12.35	1.8	11.85	8.51	4.45	17.6	18.9	20.6	0.85
428F	12.7	11.8	1.5	7.94	8.51	4.51	16.7	18.3	17	0.7
428-Y1	12.7	11.8	1.4/1.5	7.75	8.51	4.45	16.7	18.05	15.5	0.67
428HW-F1	12.7	12.3	1.9	7.75	8.51	4.45	18.3	19.8	20	0.88
C428SH-F1	12.7	11.8	2.03/2.42	7.85	8.51	4.45	19.7	/	27.4	1
428H-F2	12.7	11.8	1.8	7.75	8.51	4.45	17.6	18.9	20.6	0.79
520	12.7	15	2.03	6.35	10.16	5.08	17.2	18.6	26.6	0.94
520H	12.7	15	2.42	6.35	10.14	5.24	18.9	20.2	30	1.08
520-F2	12.7	15	1.6	6.48	10.16	5.08	15.5	16.9	21	0.8
520H-F2	12.7	15.1	2.4/2.8	6.35	10.16	5.24	19.8	21.1	38	1.28
520H-F3	12.7	15	2.4	6.35	10.16	5.24	19.2	20.6	35	1.21
T522H	12.7	15	2.2	6.35	10.14	5.24	18	19.7	30	1.02
525	12.7	15	2.03	7.94	10.16	5.08	18.8	20.2	26.6	1
525H	12.7	15	2.42	7.94	10.16	5.24	20.4	22	30	1.1
530H	12.7	15	2.42	9.4	10.16	5.08	21.9	23.3	30	1.1
530HK	12.7	15.5	2.42	9.35	10.7	5.64	22.2	23.5	38	1.4
530	12.7	15	2.03	9.4	10.16	5.08	20.6	22	26.6	1.06
628	12.7	11.74	1.58	7.85	8.51	4.45	16.5	18	17.8	0.73
628H	12.7	11.74	2	7.75	8.51	4.45	18.3	/	20.6	0.79
630	12.7	18	2.42	9.4	11.91	5.94	22.2	24.2	35	1.26
630H	12.7	18	3.25	9.4	11.91	5.94	25.4	/	35	1.61
630H-F1	12.7	19.8	3.2	9.4	11.91	5.94	25.4	27	35	1.95