

RS416 INSTRUCTIONS

TO BE INSTALLED BY A CERTIFIED MECHANIC ONLY | FOR RACE USE ONLY

BRAKE SIDE EXPLODED VIEW



FOR: KAWSAKI ZX636R 2013



PLEASE NOTE:
The adjustability of these rearsets will require that you install a longer hose between the rear brake master cylinder & fluid reservoir. Brake fluid hose is included in Kit. Once you decide on footpeg position hose length can be adjusted.

INDEX

- Lubricate
- Red Thread Lock
- DO NOT Overtighten
- Use Factory Piece

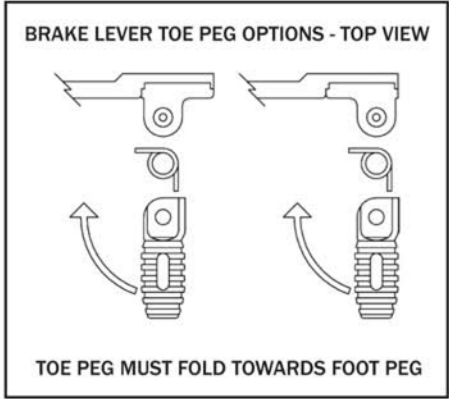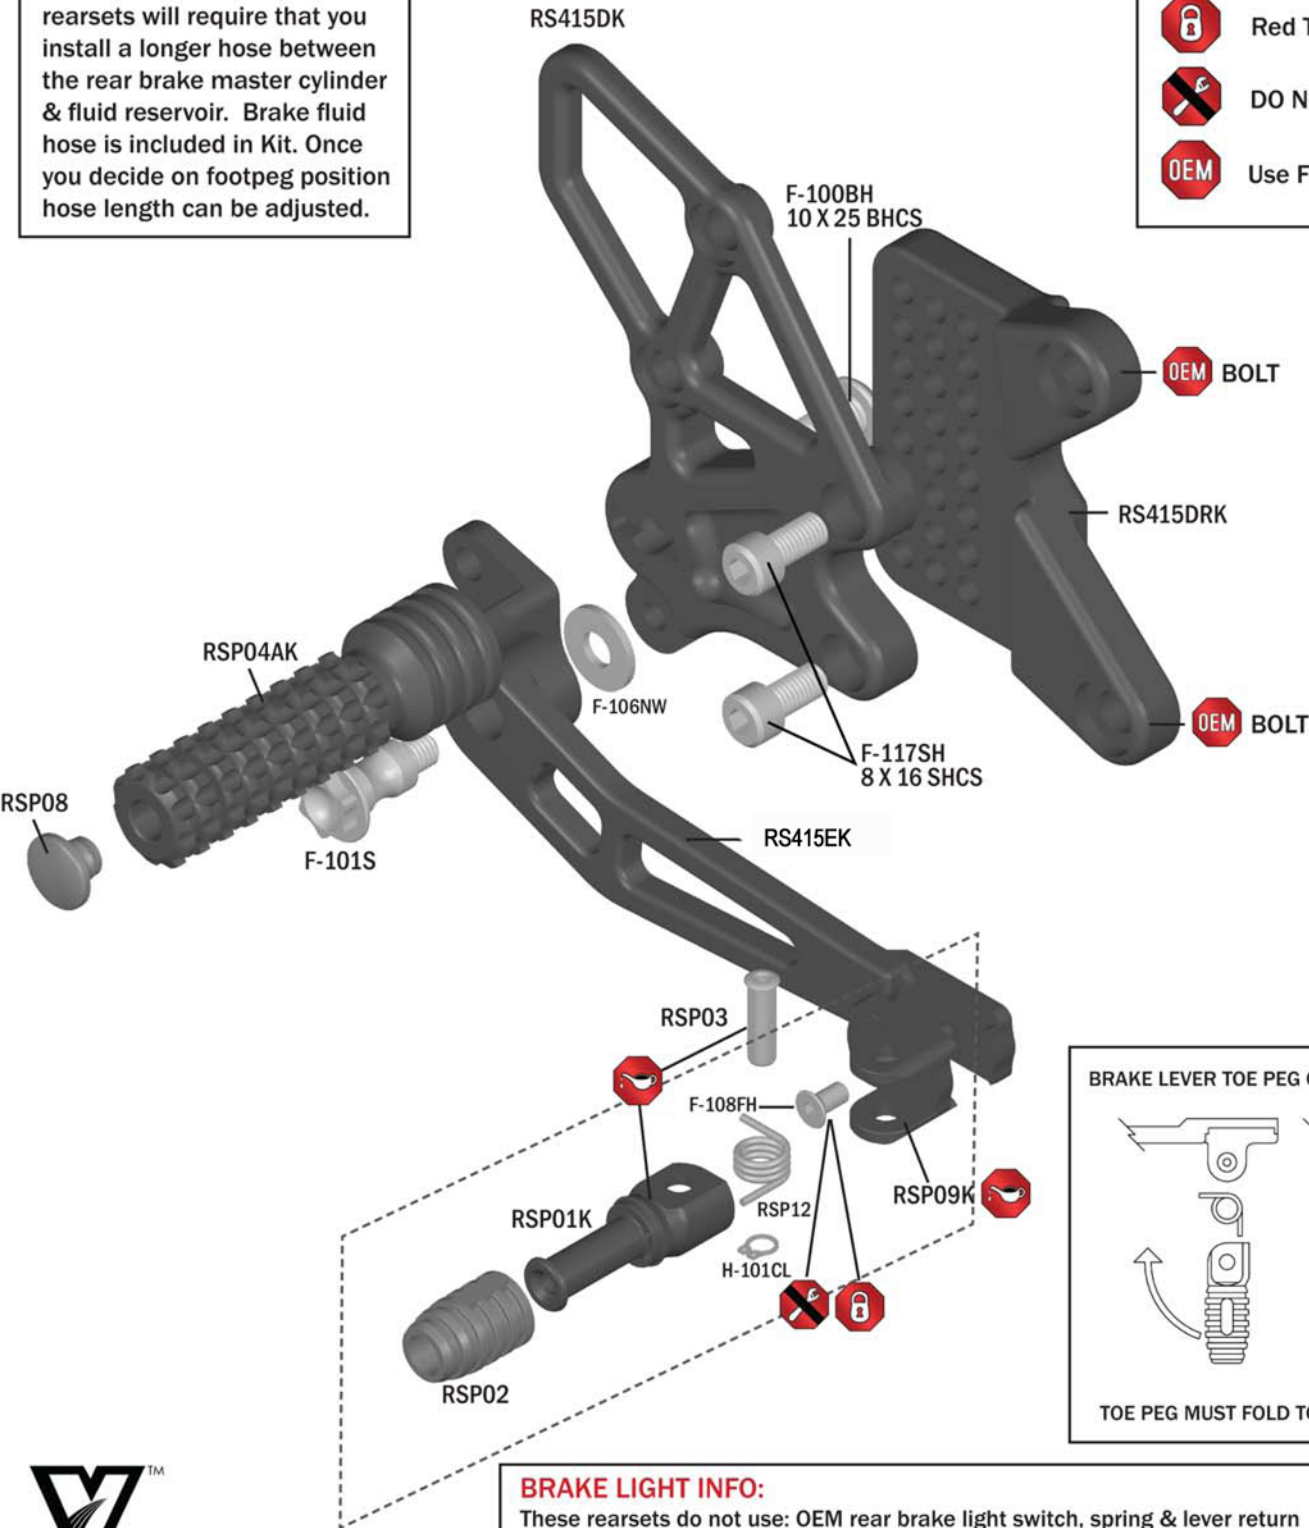

BRAKE LIGHT INFO:


These rearsets do not use: OEM rear brake light switch, spring & lever return spring. In race form these rear sets no longer activate rear brake light from rear brake lever. Street use requires rear brake light to be activated by rear & front brake levers. To achieve rear brake light activation from rear brake lever use Vortex in-line pressure switch RS100.

RS416 INSTRUCTIONS

TO BE INSTALLED BY A CERTIFIED MECHANIC ONLY | FOR RACE USE ONLY

SHIFT SIDE EXPLODED VIEW

FOR: KAWASAKI ZX636R 2013

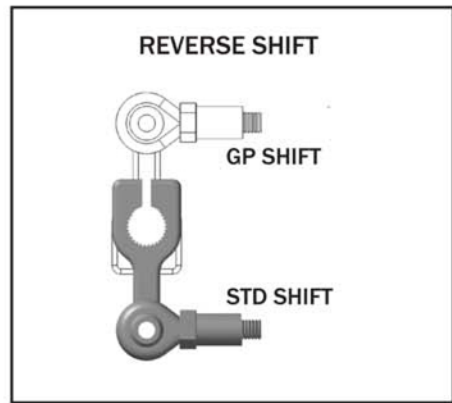

INDEX

- Lubricate
- Red Thread Lock
- DO NOT Overtighten
- Use Factory Piece

