

# RS616 INSTRUCTIONS

TO BE INSTALLED BY A CERTIFIED MECHANIC ONLY | FOR RACE USE ONLY


## BRAKE SIDE EXPLODED VIEW

FOR: YAMAHA R6 06-11 ADJUSTABLE




### INDEX

-  Lubricate
-  Red Thread Lock
-  DO NOT Overtighten
-  Use Factory Piece

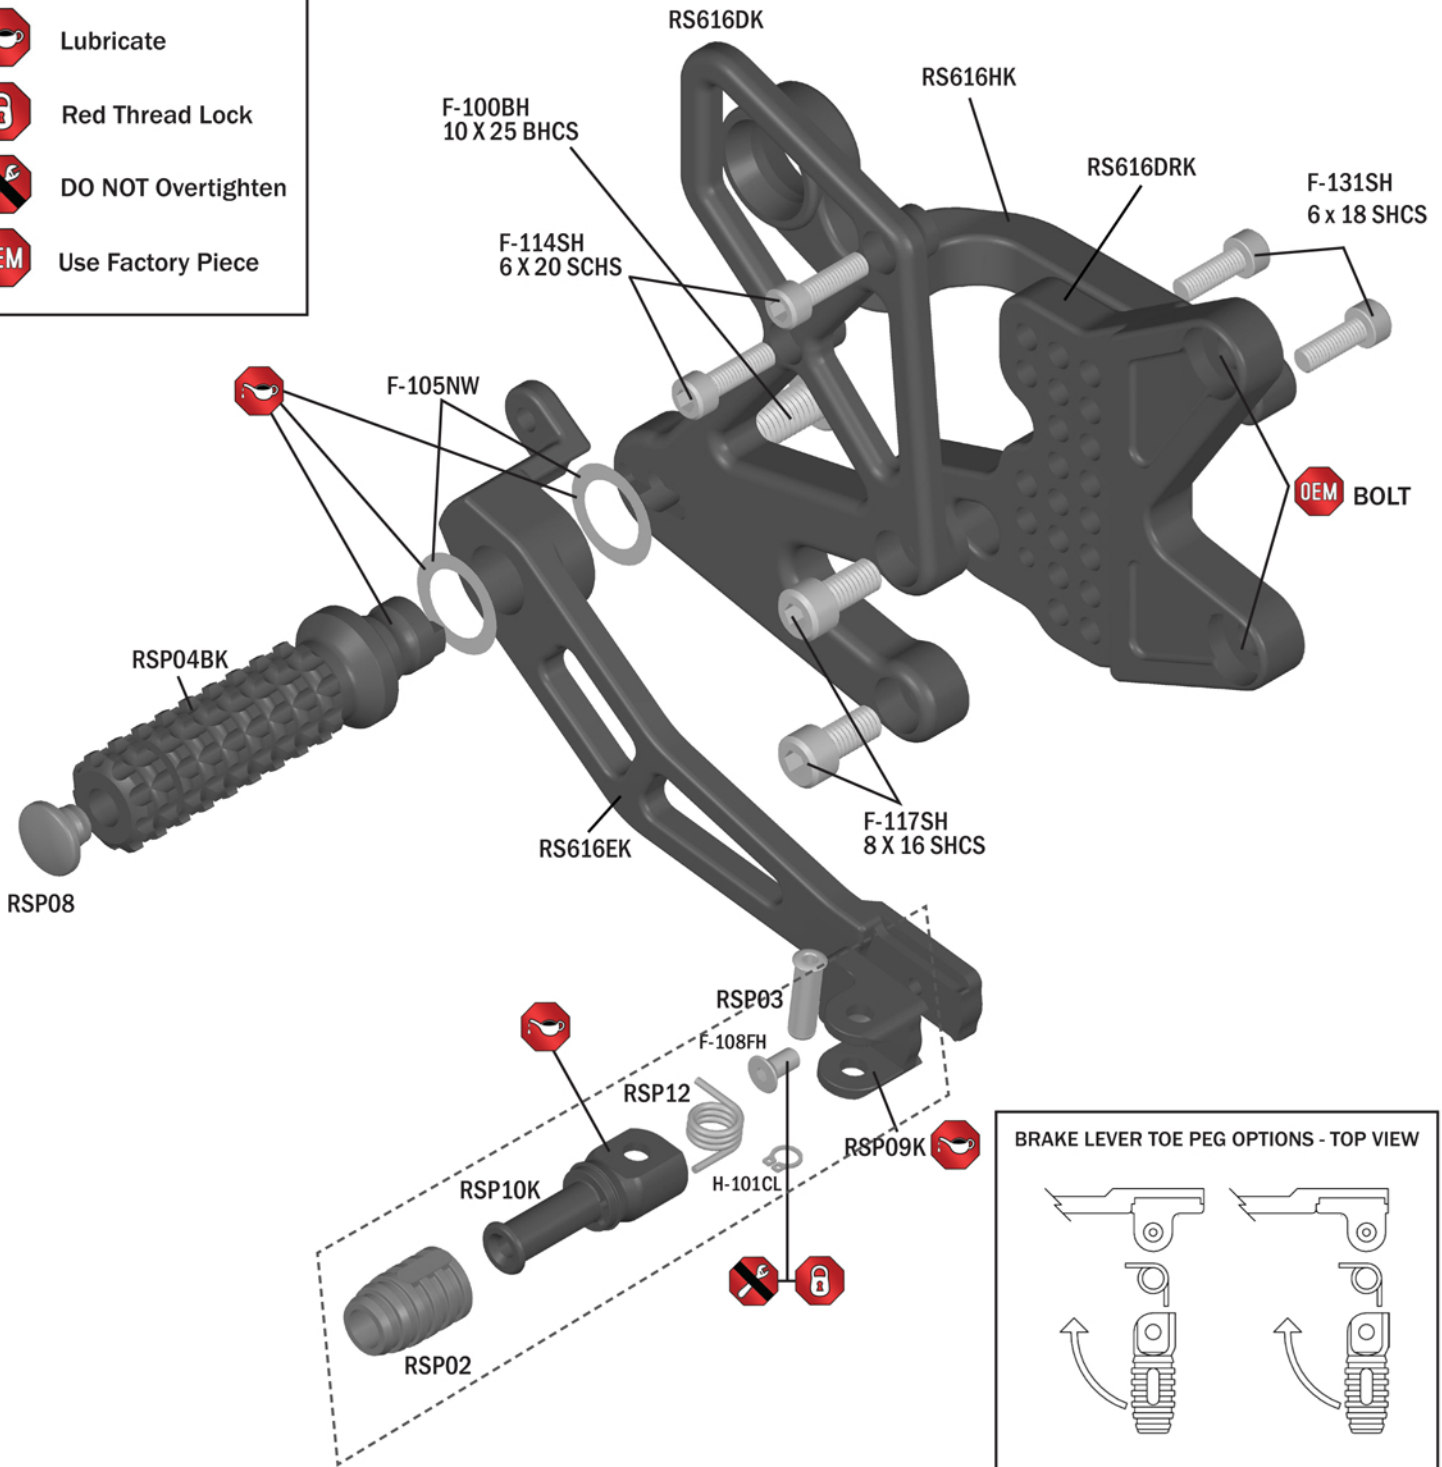

#### BRAKE LEVER TOE PEG OPTIONS - TOP VIEW

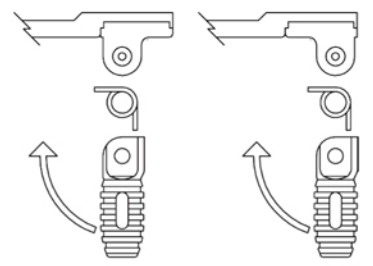

TOE PEG MUST FOLD TOWARDS FOOT PEG



#### BRAKE LIGHT INFO:

These rearsets do not use: OEM rear brake light switch, spring & lever return spring. In race form these rear sets no longer activate rear brake light from rear brake lever. Street use requires rear brake light to be activated by rear & front brake levers. To achieve rear brake light activation from rear brake lever use Vortex in-line pressure switch RS100.



# RS616 INSTRUCTIONS

TO BE INSTALLED BY A CERTIFIED MECHANIC ONLY | FOR RACE USE ONLY



## SHIFT SIDE EXPLODED VIEW

FOR: YAMAHA R6 06-11 ADJUSTABLE



### INDEX

- Lubricate
- Red Thread Lock
- DO NOT Overtighten
- Use Factory Piece

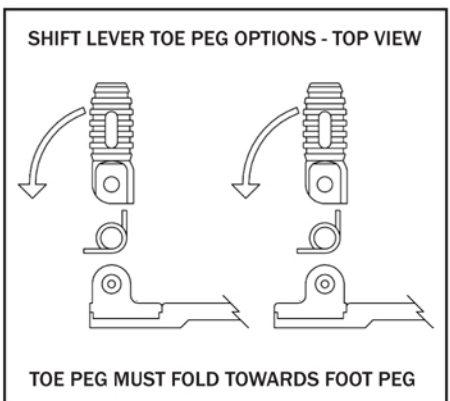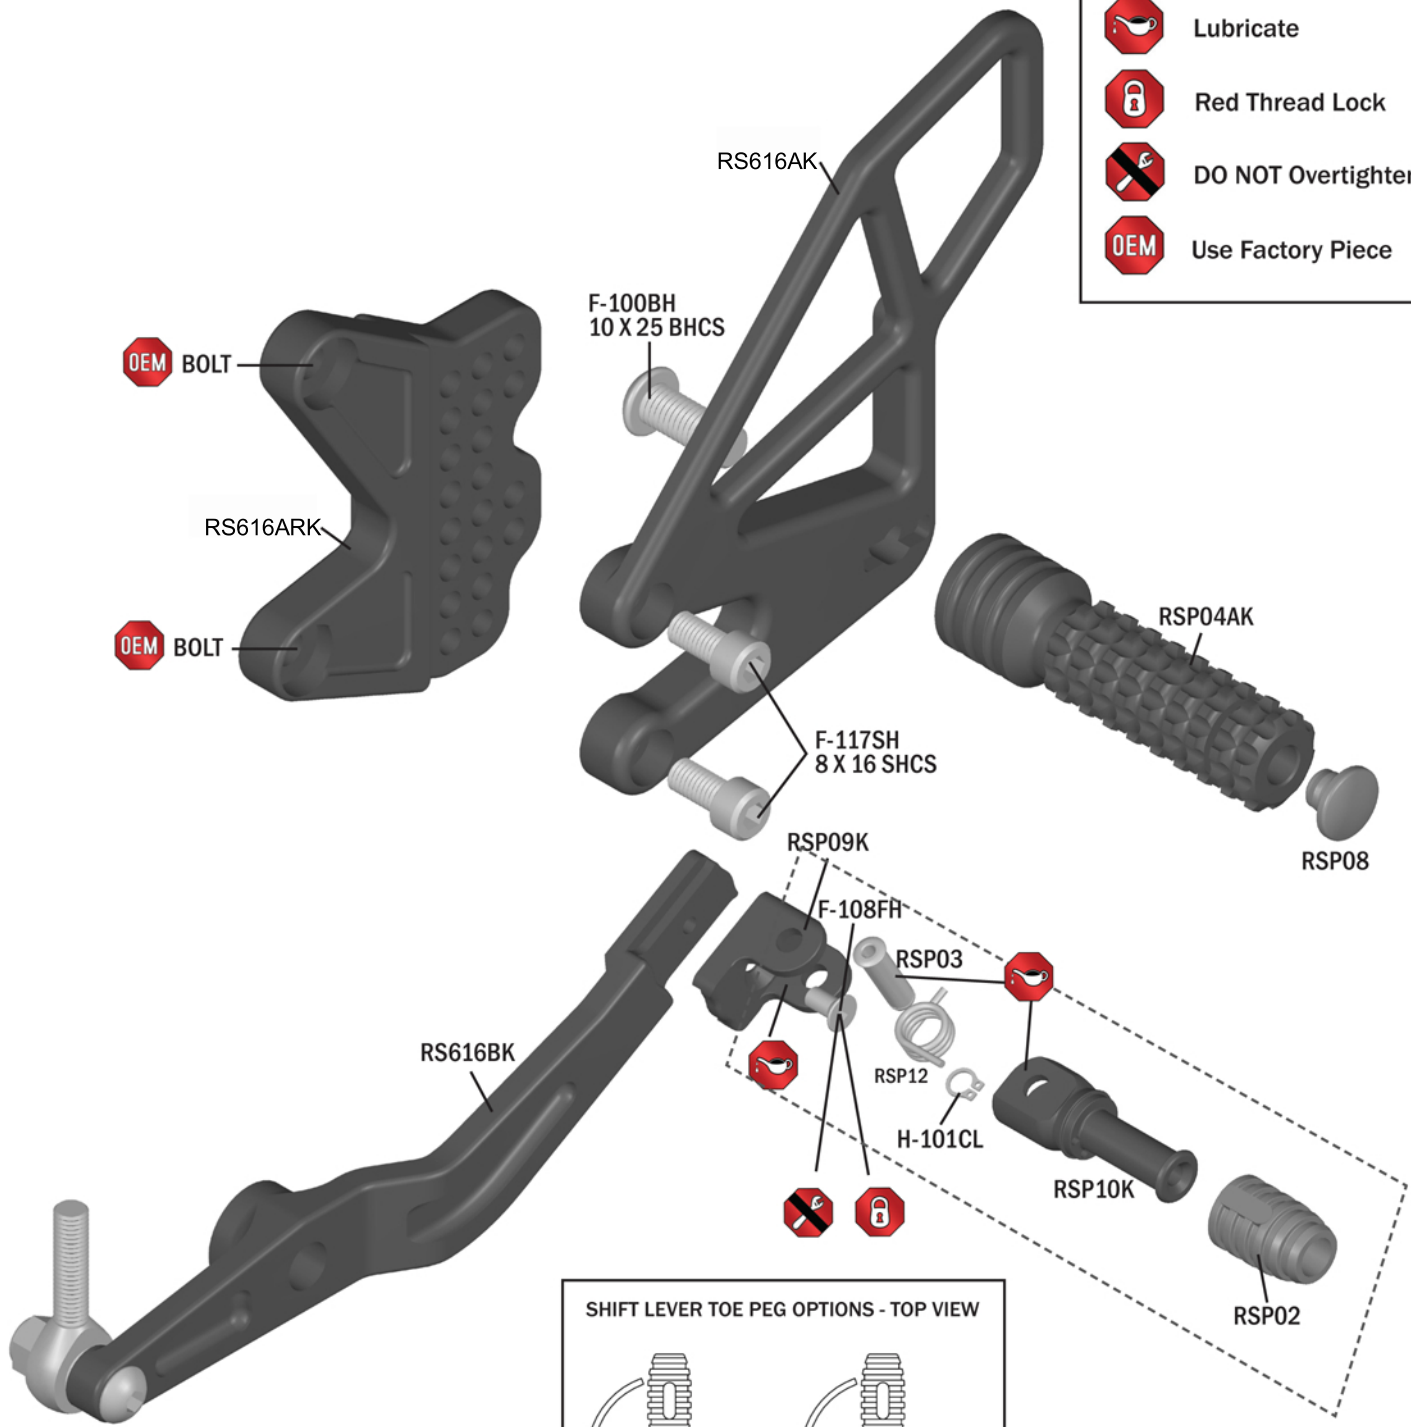

Check out a selection of motorcycle foot controls & pegs offered in our online store.