



## DMY-06R6-K

## Damper Mount Yamaha R6 (2006-2016)

### PARTS LIST

• Mounting Bracket	1	Flat Head Bolt, M6 x 25mm	2
• Fork Clamp, 50mm	1	Hex Head Bolt, M6 x 20mm	1
• Torx Head Bolt, M8 x 30mm	2		

**<<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>>**

This is a factory racing part and requires an experienced mechanic to install properly.


This damper mount requires the removal of the key switch in order for the steering damper to mount properly. The key switch will have to be replaced with a toggle switch mounted on the fairing bracket. **Graves Motorsports does not provide instructions or tech support on how to relocate and rewire the switch.**

- 1) This damper mount is designed to be used with an Ohlins steering damper (Graves Motorsports part # SD068 purchased separately)
- 2) Install the mounting bracket onto the right side of the ram air duct. Apply thread locking compound and torque (15 Nm / 11 ft lbs).



- 3) Install the fork clamp onto the left fork leg, under the handlebars. The fork clamp is mounted with the step pointing downward.

- 4) Install steering damper (see photo) and align the fork clamp. Apply thread locking compound and the pinch bolt torque (15 Nm / 11 ft lbs).

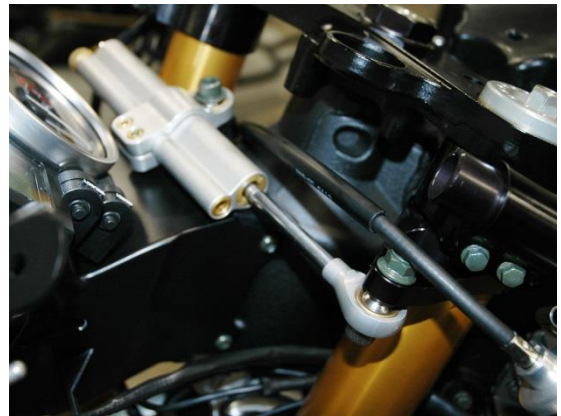

- 5) Torque the damper mount bolts (15 Nm / 11 ft lbs).
- 6) Check steering for lock to lock clearances; adjust the fork leg clamp and damper body clamp to achieve full lock to lock steering movement.
- 7) Periodically check the torque on all of the bolts.

The purchaser releases Graves Motorsports, Inc from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident. **This product is intended for Closed Course Competition Use Only** and may render the vehicle illegal for use on public roads.