

INSTALLATION PROCESS:

Front Brake Line Kit

General Instructions

Torque specifications
Stainless steel 15-17 ft. lbs
Aluminum 12-15 ft. lbs



Step 1:

Identify the key components that complete our brake line kit:

You should have one (1) line and two (2) single banjo bolts. We have also included a total of six (6) washers; four (4) will be used, and two (2) will be spares. We strongly suggest having a professional mechanic install your brake lines, all other installs may void your warranty.

Step 2:

To ensure there is no paint damage from the brake fluid, completely cover the front end of the bike. Installing brake lines can be a messy process, and brake fluid *WILL* spill!

Step 3:

After bleeding and drying out the OEM brake system, uninstall your front stock hose. Take note of how the stock system was routed in case you need to re-install the hose.

Step 4:

Familiarize yourself with the new Galfer brake line; identify which fitting to install to the front master cylinder. Install the line to the master cylinder using a single banjo bolt and two (2) washers, the sequence will be as follows; master cylinder, washer, banjo fitting, washer, single banjo bolt (**see picture A.**)

Step 5:

Similar to the OEM routing; Route the line *in front* of the number plate and down through the stock line holder at the triple tree (**see picture B.**) Continue to route the line down *the front of the fork*, re-using the stock line holder. Run the line between the fork and the tire, towards the caliper (**see picture C**) Install the line to the caliper using a single banjo bolt and two (2) washers, the sequence will be as follows; caliper, washer, banjo fitting, washer, single banjo bolt (**see picture D.**)

**Please note that although Galfer fittings come pre-positioned from the factory for easy installation, differences in bike setup, bar position, control angle, etc. may require the banjos to be rotated slightly. All Galfer fittings are what we refer to as turn-to-fit and can be rotated to alleviate twist or tension in the lines. To do so, firmly hold the crimped portion of the line; insert a wood dowel, brass punch, or pen into the banjo, and rotate as shown in the diagram below. Just be sure to only apply rotational force and NEVER pry on the connection. If you have any questions, please contact our tech department before attempting this procedure.*

Step 6:

Before you begin the next step, please check the clearance of your new line. When the front end is fully extended or compressed, make sure the line does not bind with anything. Be sure to triple check that the line is traveling correctly and is clear from any obstructions.

Step 7:

Bleed your brake system according to the owner's manual. Add Galfer DOT-4 brake fluid to the system and build appropriate pressure.

Step 8:

Once you have bled the system, please check the brake fluid level in your master cylinder. Top off your brake fluid according to your manual and close the brake fluid reservoir. To ensure there are no leaks or other issues, zip-tie the brake lever to the throttle for at least 2 hours. If the line is not leaking and all else looks good, (bolts are tight and torqued down to specification, washers are in place, and lines are clear from obstruction) you are now ready to ride with the new brake system.

Please be aware that the overall braking feel has been changed dramatically. We suggest taking it easy while you

get used to the new brake lever pressure and feel. We recommend checking your brake system periodically; be sure to check that your bolts are tight and *VERY* carefully check your lines for any leaks or damage. If there are any signs of damage or stress to the lines, the complete brake line kit will need to be replaced. Remember, our brake lines have a LIFETIME WARRANTY!



A. Master Cylinder




B. Number Plate/ Stock Line Holder



C. Stock Line Holder at Fork



D. Caliper with optional Galfer Oversize relocation bracket

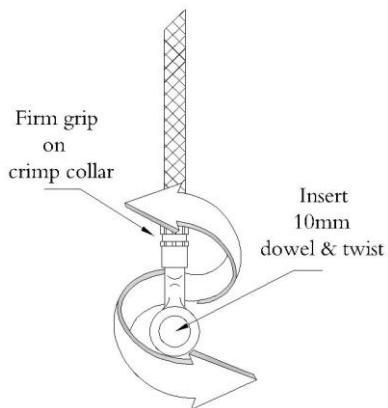

Discover other motorcycle parts on our website.