

## INSTALLATION INSTRUCTIONS

SIGNATURE SERIES VANTAGE HORN COVER BY JOHN SHOPE, CHROME & BLACK

5697

### THANK YOU FOR CHOOSING KURYAKYN!

Protect yourself and others from possible injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

**WARNING** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

**CAUTION** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN MINOR OR MODERATE POTENTIAL INJURY.

**NOTICE** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN MAY NEGATIVELY AFFECT PRODUCT PERFORMANCE AND FUNCTIONALITY OR DAMAGE THE PRODUCT ITSELF OR THE PRODUCT TO WHICH IT IS BEING ATTACHED.

### ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- 1 Horn Cover Assembly

### YOU WILL ALSO NEED:

Hex wrench set


**NOTICE** THESE INSTALLATION INSTRUCTIONS CONTAIN IMPORTANT INFORMATION. ENSURE THE END USER RECEIVES THIS COPY AND IS AWARE OF ITS IMPORTANCE FOR FUTURE USE.

**STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let motorcycle cool.

**STEP 2** Refer to PIC 2. Dismantle the cover by unfastening the button head screw located at the bottom of the cover. Remove the top cover from the base cover.

**STEP 3** Refer to PIC 3 and 4. Remove the existing hardware and horn cover. Set the hardware side, it will be reused.

**STEP 4** Refer to PIC 5. Locate the base cover that was separated in Step 2. Align the mounting holes of the base cover with the horn cover mounts on the bike. Fasten it in place using the hardware that was removed in Step 3. Fully tighten hardware.

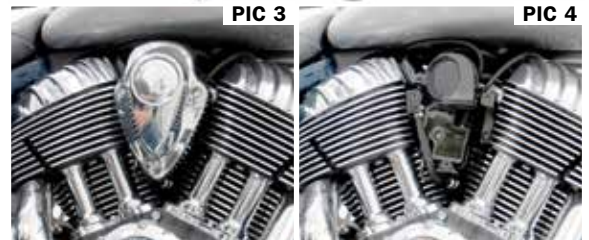

## INSTALLATION INSTRUCTIONS

SIGNATURE SERIES VANTAGE HORN COVER BY JOHN SHOPE, CHROME & BLACK

5697

-CONTINUED-

- STEP 5** Refer to PIC 6 and 7. Locate the top cover. Slide the top cover over the installed base cover, be sure the top tab of the top cover is inserted into the notch of the base cover.

OFF BIKE VIEW


PIC 6

PIC 7



- STEP 6** Refer to PIC 8. Fasten the top cover to the base cover using the button head screw that was removed in Step 2. Fully tighten hardware.

PIC 8

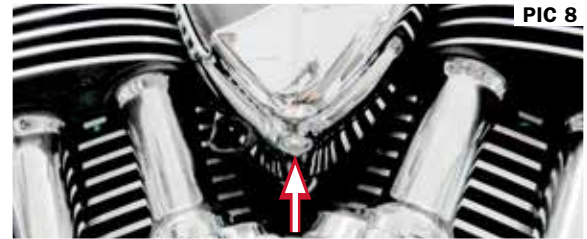

**NOTICE**

IT IS THE INSTALLER'S RESPONSIBILITY TO ENSURE THAT ALL OF THE FASTENERS (INCLUDING PRE-ASSEMBLED) ARE TIGHTENED BEFORE OPERATION OF THE MOTORCYCLE. KURYAKYN WILL NOT PROVIDE WARRANTY COVERAGE ON PRODUCTS OR COMPONENTS LOST DUE TO IMPROPER INSTALLATION OR LACK OF MAINTENANCE. PERIODIC INSPECTION AND MAINTENANCE ARE REQUIRED ON ALL FASTENERS.

FINAL

