



CHROME SWINGARM COVER SET

8256

PARTS INCLUDED

- 1 Left Upper Swing Arm Cover
- 1 Right Upper Swing Arm Cover
- 1 Left Lower Swing Arm Tube Cover
- 1 Left Upper Swing Arm Tube Cover
- 1 Right Lower Swing Arm Tube Cover
- 1 Right Upper Swing Arm Tube Cover
- 1 Left Phantom Cover—**NO LIGHT**
- 1 Right Phantom Cover—**NO LIGHT**
- 1 Hardware Kit Including:
 - 1 5/16"-18 X 1" Hex Head Cap Screw—HHCS
 - 1 5/16" I.D. Flat Washer
 - 3 1/4"-20 Nylock Nuts
 - 3 1/4"-20 x 5/8" Socket Head Cap Screws—SHCS
 - 2 Flat Clamps for Upper Swing Arm Cover
 - 1 "P" Clamp for Upper Swing Arm Cover
 - 2 1/4"-20 x 7/8" Hex Head Cap Screws—HHCS
 - 2 Mounting Tab Clamps with 1/4" Hole
 - 2 1/4" I.D. Internal Tooth Lock Washers
 - 4 #10/32 x 1/2" Button Socket Cap Screws—BSCS
 - 4 #10 Wave Washers
 - 2 "L" Brackets
 - 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND NOTICES REGARDING THE USE AND CARE OF THIS PRODUCT.

⚠ WARNING	THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.
------------------	--

NOTICE	This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.
---------------	--

NOTICE	IF INSTALLING THIS PRODUCT FOR ANOTHER PARTY, PLEASE MAKE SURE THEY RECEIVE THIS COPY OF THE INSTALLATION INSTRUCTIONS SO THEY ARE AWARE OF THE IMPORTANT INFORMATION CONTAINED IN THEM.
---------------	---

TOOLS SUGGESTED

Set of Hex Wrenches, Set of Combination Wrenches, Wire Cutter/Stripper

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let cool.



YOU WILL BE WORKING AROUND THE ENGINE AND EXHAUST SYSTEM DURING INSTALLATION. ENSURE THAT THE ENGINE AND EXHAUST SYSTEM HAVE FULLY COOLED TO PREVENT INJURY.

STEP 2

Identify the components used on the right and left sides of the bike. The frame tube covers are cut to length to exactly fit the lengths of tubing on each side of the swingarm. To identify placement of these different tube covers, look for cutouts that will fit around various contours and tabs welded to the swing arm. The rear axle or "Phantom" covers are identified with "L" or "R" on the inner surface.

STEP 3

Snap the chrome tubing covers into place on each side of the swingarm. PIC 1 Although these fit tightly, you may place a couple small dabs of silicone on the inner surface of each cover for added security.

STEP 4

Install the upper swing arm covers.

RIGHT SIDE:

PIC 2 shows the orientation of the "flat" and "P" style clamps on the cover. The "flat" clamp will be used on the end of the cover nearest the front of the bike, and the "P" clamp will be used nearest the rear. Both clamps are fastened with a 1/4"-20 x 5/8" Socket Head Cap Screw and a Nylock Nut.

LEFT SIDE:

This cover will attach in a similar manner to the right side, but instead of the "P" clamp in the rear location, it will attach to the belt guard mounting tab on the swingarm. The stock 5/16" bolt and nut will be used here, but a 5/16" flat washer will be placed over the mounting tab for added strength. (PIC 3 shows an installed upper swingarm cover — right side.)

STEP 5

Install the rear Phantom Covers. Check for proper side orientation. Install the small tab clamp to the rear of each cover as shown (PIC 5)— loosely for now. Use the 1/4"-20 x 7/8" hex fasteners and 1/4" I.D. internal tooth star washers.

STEP 6






Loosen the rear axle adjuster lock nut – **DO NOT LOOSEN THE ADJUSTER!** Install the mounting brackets by sliding the brackets between the locknut and the frame as shown. PIC 6 Tighten the locknut against the bracket, firmly pinching the bracket into place.

STEP 7

"Hook" the rear tab clamp over the end of the Swing Arm where indicated. PIC 7 Using the #10-32 B.S.C.S. and #10 Wave Washers, fasten the Phantom covers to the mounting brackets. Tighten the 1/4" hex fastener at the rear of the cover to tighten the tab clamps.

NOTICE

It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not provide warranty coverage on products or components lost due to improper installation or lack of maintenance. Periodic inspection and maintenance are required on all fasteners.

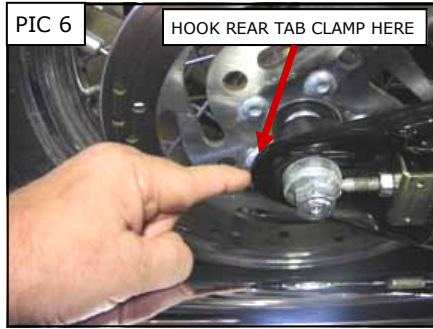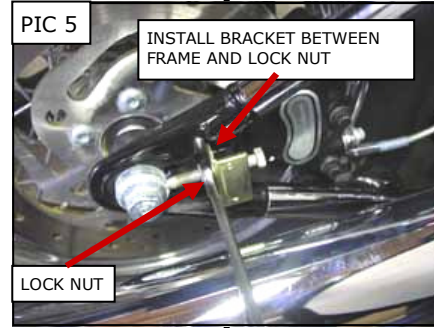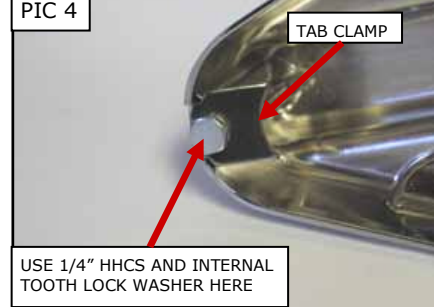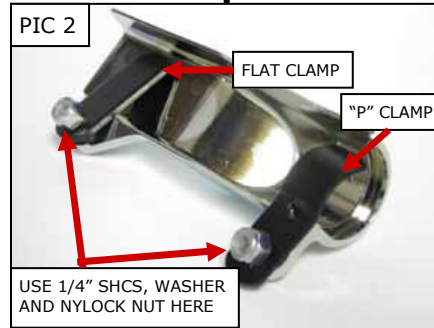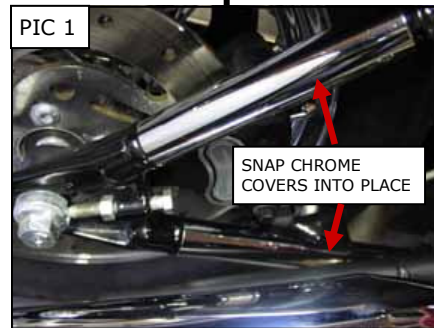

Ride On!

CHROME SWINGARM COVER SET INSTALLATION