

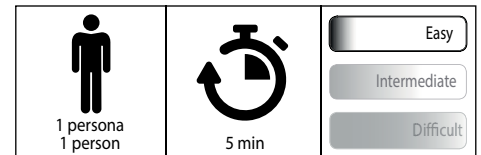
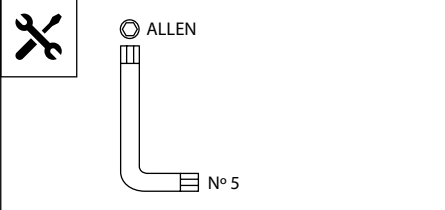




HONDA AFRICA TWIN '16- / AFRICA TWIN ADV. SPORT '18-

Mod. TOURING
Ref.: 8905





Mod. RACING
Ref.: 8904



ID.	PART	DESCRIPTION	QTY.
1		Touring Dome impact methacrylate	1
1		Racing Dome impact methacrylate	1
2		M5x4 rubber washers	4
3		12mm x 3mm silicon tear	2

HONDA AFRICA TWIN '16- / AFRICA TWIN ADV. SPORT '18-

MOUNTING INSTRUCTIONS

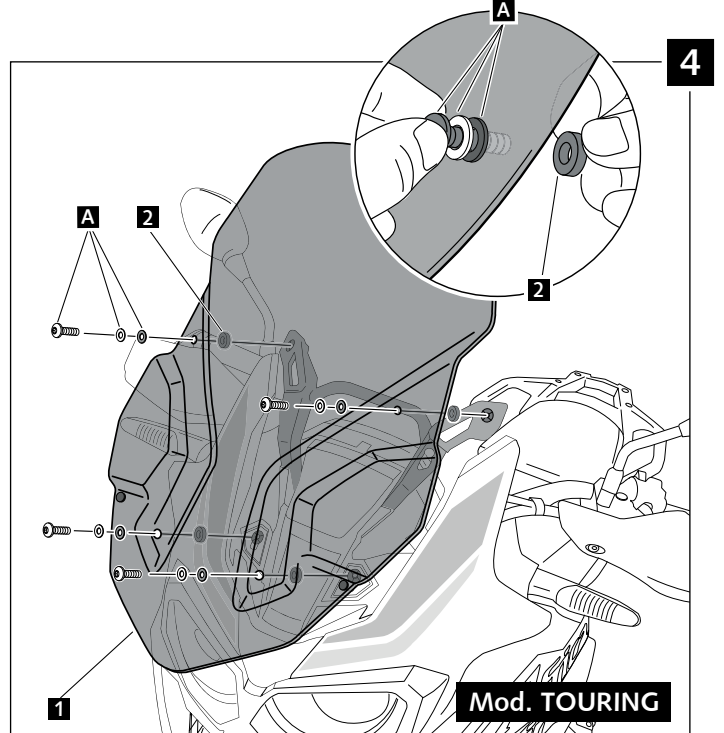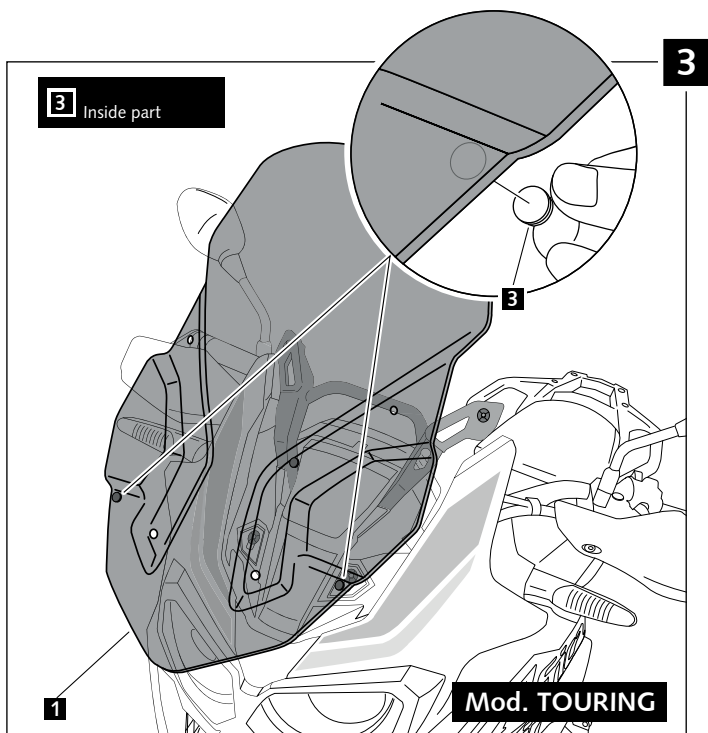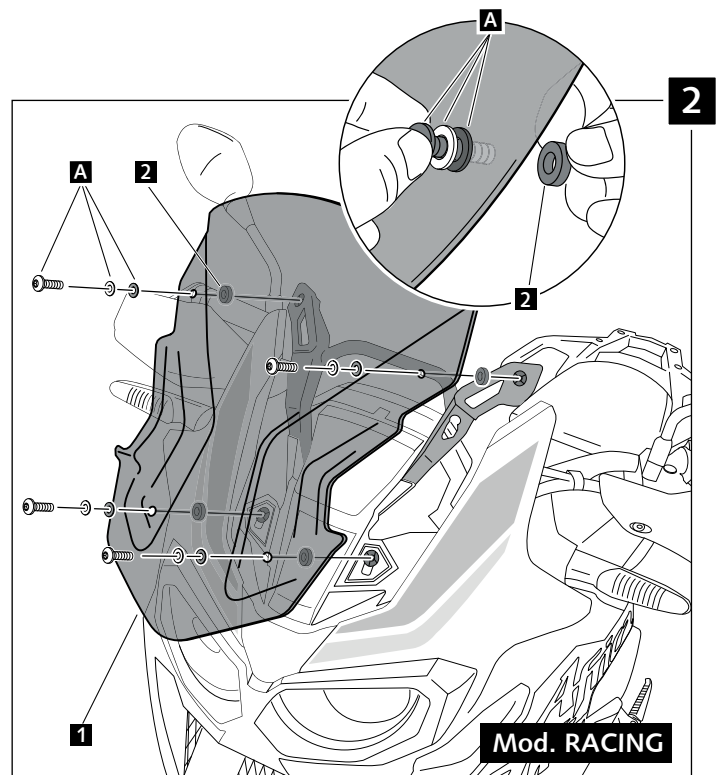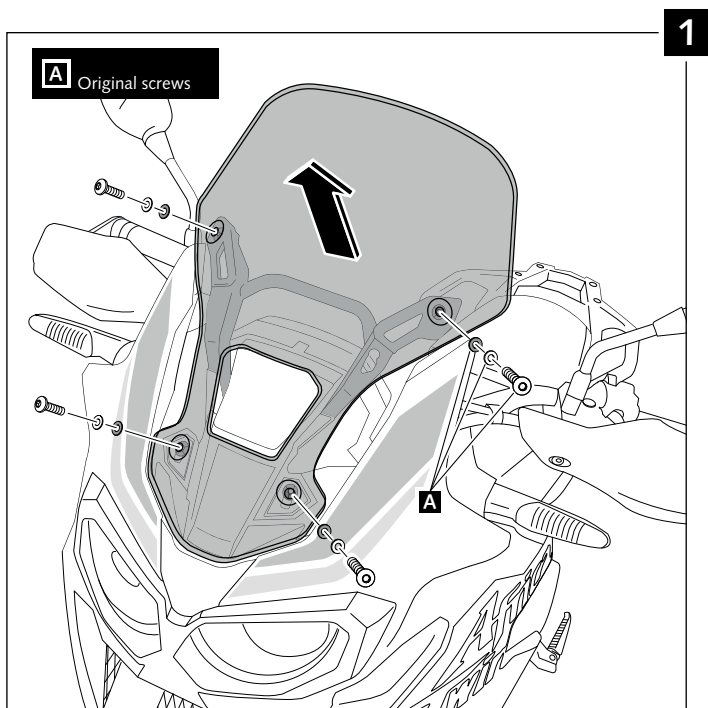

TIPS FOR A CORRECT WINDSCREEN ASSEMBLY

Due to storage and transport processes of the windscreens, which are subjected to positions and temperature changes out of our control, this may produce small deformations on the material causing some difficulties on the mounting process. It is recommended to:

- 1- Place the screws on one side without tighten all the way.
- 2- Stretch the windscreen to the other side (see Fig. 1). The flexibility of the material allows this stretch with no risk of breaking or cracking.
- 3- Place the screws without tightening all the way.
- 4- Tighten progressively all the screws.

