



**FITTING INSTRUCTIONS FOR EH0089BK EXHAUST HANGER**  
**HUSQVARNA VITPILEN 701 2018-**




**HIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED BELOW.**  
**DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.**

Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike.

Please note that in cases where kits are packed with rubber O rings holding the components onto the bolt – *the rubber O rings should be thrown away!*

THE PARTS SHOWN MAY BE REPRESENTATIVE ONLY (FOR CLARITY OF INSTRUCTIONS ONLY)

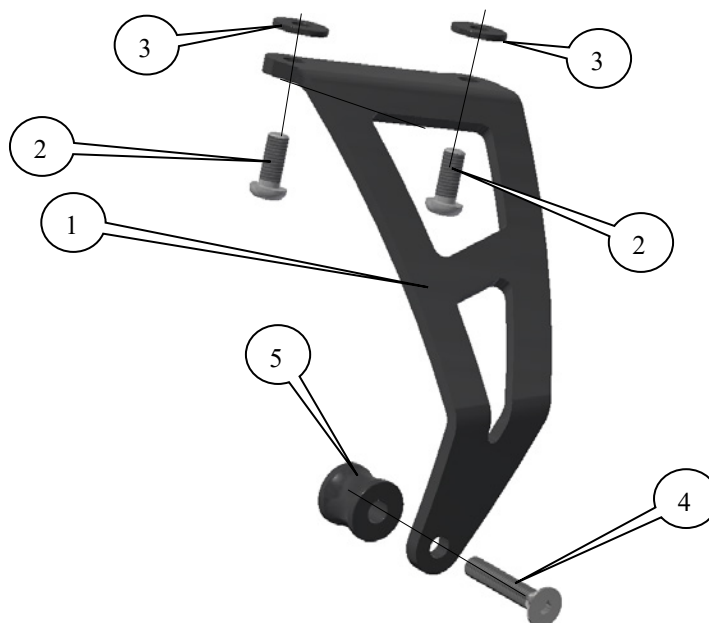

**LEGEND**

- ITEM 1 = EXHAUST HANGER (HB0089) (x1).  
ITEM 2 = M8 x 20mm LONG BUTTON HEAD BOLT (x2).  
ITEM 3 = M8 RUBBER WASHERS (RW003) (x2).  
ITEM 4 = M8 x 45mm LONG COUNTER-SUNK BOLT (x1).  
ITEM 5 = SPACER 21.5mm LONG (S1154) (x1).

**TOOLS REQUIRED**

- Set of metric Allen keys to include 4, 5 & 6mm A/F sizes.
- Socket set to include 10, 12 & 13mm Sockets.

Please note that in cases where kits are packed with rubber O rings holding the components onto the bolt – *the rubber O rings should be thrown away!*

**GENERAL TORQUE SETTINGS**


- M4 BOLT = 8Nm  
M5 BOLT = 12Nm  
M6 BOLT = 15Nm  
M8 BOLT = 20Nm  
M10 BOLT = 40Nm




PICTURE 1




PICTURE 2

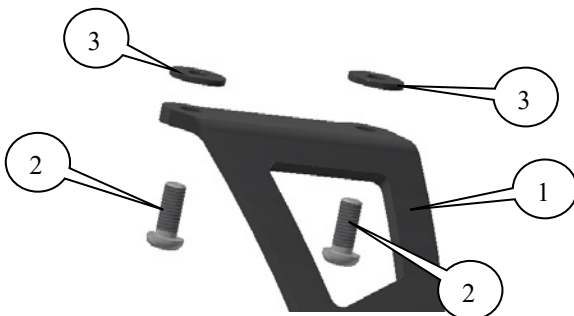

PICTURE 3

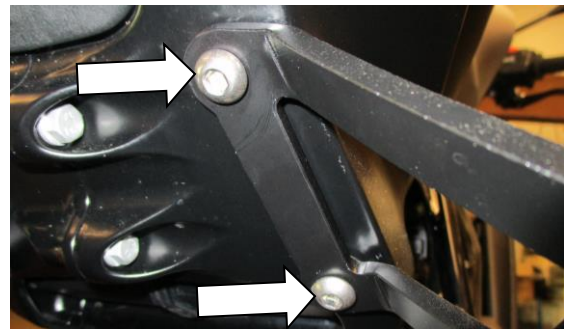

PICTURE 4

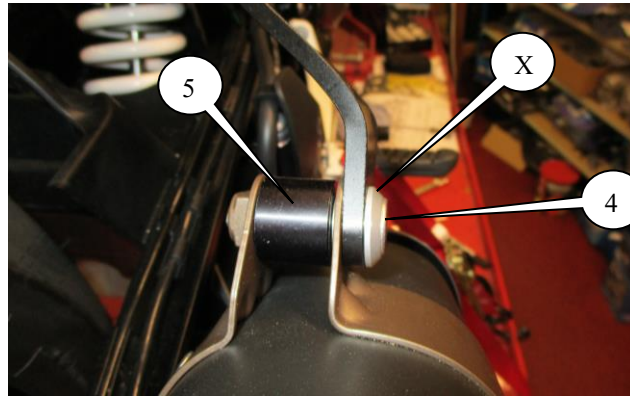

PICTURE 5

### **FITTING INSTRUCTIONS**

- To fit the R&G Exhaust Hanger, the OEM pillion footrest mounting bracket needs to be removed.
- To do this, remove the two mounting bolts at the top of the pillion footrest mounting bracket as arrowed in picture 1.
- Remove the exhaust mounting bolt (arrowed in picture 2) and then remove the OEM pillion footrest mount from the bike.
- Place the two M8 button head bolts (item 2) through the new exhaust hanger bracket (item 1) as shown in picture 3, then place the rubber washers (item 3) onto the exposed threads as shown in picture 3.
- Offer this assembly into position and secure in place as shown in picture 4.
- Place the M8 counter-sunk bolt (item 4) through the original spacer (marked X), then through the new exhaust bracket (item 1), then through the original exhaust bracket and new spacer (item 5) as shown in picture 5.
- Ensure the exhaust hanger is correctly fitted before tightening all bolts.
- Please ensure when the motorcycle is being used that no parts are in such a position that they may collide/damage other bike parts (this is particularly important if using after-market cans or exhaust systems).

***Please note that it is your responsibility to ensure that no part of the exhaust hanger or exhaust assembly fouls or comes into contact with other parts of the machine. Do not ride the motorcycle until this aspect has been verified and you have compressed the rear suspension (if appropriate to the design of the motorcycle) to test this thoroughly.***

ISSUE 1 13/11/2018 (NSY)

### **CONSUMER NOTICE**

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.